

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/108552 A1

(51) International Patent Classification⁷: **B65D 71/00**,
B60P 7/08

(21) International Application Number:
PCT/GB2004/002166

(22) International Filing Date: 20 May 2004 (20.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0312791.7 4 June 2003 (04.06.2003) GB
0322549.7 26 September 2003 (26.09.2003) GB

(71) Applicant (for all designated States except US): **LOAD-
HOG LIMITED** [GB/GB]; The old West Gun Works, Sav-
ille Street East, Sheffield S4 7UQ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FACEY, Hugh**,


David [GB/GB]; Clifford House, Ecclesall Road South,
Whirlow, Sheffield S11 0PX (GB). **SHAWCROSS,**
Brian, Edward [GB/GB]; 14 Rose Avenue, Retford,
Nottinghamshire DN22 7HR (GB). **BOALER, Derek**
[GB/GB]; 88 Henley Avenue, Norton, Sheffield S8 8JJ
(GB). **MAKIN, John** [GB/GB]; 18 St. Peters Close,
Brinsworth, Rotherham, South Yorkshire S60 5NJ (GB).
GIEMZA, Lee, Mark [GB/GB]; 23 Church View, Crig-
glestone, Wakefield WF4 3PF (GB).

(74) Agents: **HULSE, Thomas, Arnold et al.**; Hulse & Co., St
James House, Vicar Lane, Sheffield S1 2EX (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,

[Continued on next page]

(54) Title: A CAP FOR PALLETISED LOADS

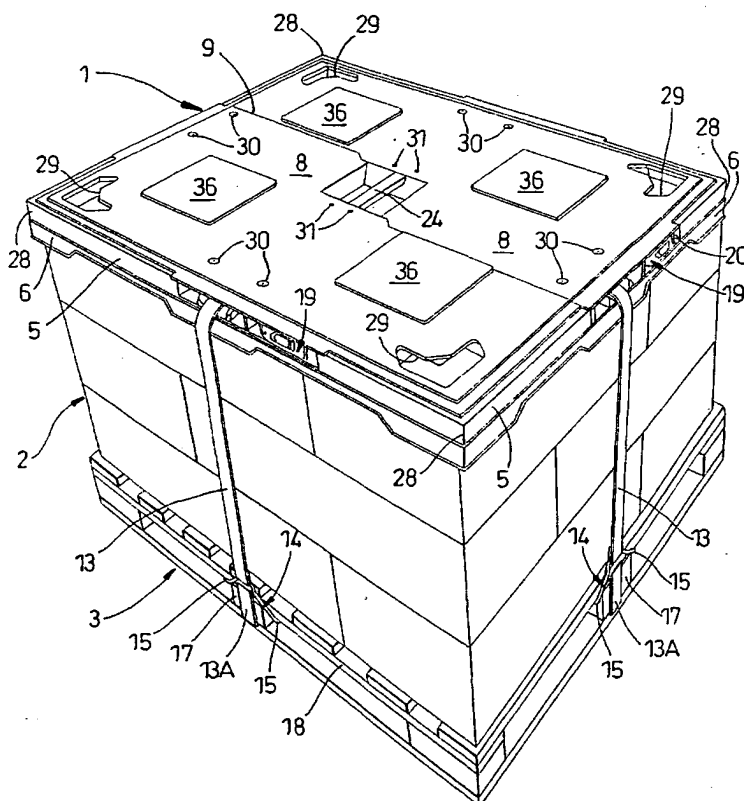

(57) Abstract: A cap for use on a palletized load has a main moulding (4) providing housings (11) at a pair or two pairs of opposite sides (5) for a cassette (12) in which a strap (13) passes through a slotted crossbar (37) between a drum (79) and a hook (14) having two prongs (15) for engaging the underside of the platform of a pallet (e.g. at each side of a middle spacer), the strap then being tensioned by a linkage (39) between the slotted crossbar (37) and a lever (19) within a slot (91) for swinging between an inoperative position (A) and an operative position (B) (e.g. up to 90° thereto) to rotate the crossbar (37) to wind the strap (13) thereon.

BEST AVAILABLE COPY

WO 2004/108552 A1

THIS PAGE BLANK (USPTO)

A CAP FOR PALLETISED LOADS

This invention relates to a cap for use on palletised loads, more particularly the type of cap having at least two strapping strands retractable into housings through openings at opposite sides (at least) of the cap, spring means within the housings for retracting the strapping strands, hooks on the free ends of the strapping strands for engagement with the underside of the platform of a pallet (e.g. a 2-way or 4-way pallet), tensioning means within the housings for tightening the strapping strands between the cap and the pallet after interposing a load between the cap and the pallet, and stop means for limiting retraction of the hooks into the housings when not engaged with a pallet.

Such a cap can be used without need to modify existing pallets, particularly - but not exclusively - those made of wood. The preferred form of hook has two prongs spaced apart so as to fit one to each side of a middle spacer of a pallet, without being in danger of damage or dislodgement by the forks of a fork-lift truck.

Two such caps are to be found in WO-A-01/96203.

In one of those caps each strapping strand is a wire or non-metallic rope retractably wound spirally on a 'thin' reel within the respective housing and having a short cylindrical core between annular flanges spaced apart by negligibly more than the overall diameter of the rope, so that the rope will be wound spirally on the core, the axis of the reel being perpendicular to the general plane of the cap, the core being on a shaft rotatably mounted within the housing, there also being provided a rewind spring coiled round the shaft alongside the reel, stop means limiting the extent to which the hook can be drawn into the housing by the action of the rewind spring, a ratchet concentric with the reel and rotatable with the reel and shaft, with a

pawl for engaging teeth on the ratchet to stop or prevent pulling of the rope from the reel, and manually-operable means for tensioning the rope when the pawl has been engaged with a tooth on the ratchet, particularly characterised in that each tooth of the ratchet has a pawl-engageable face inclined forwardly from its radially inner end with respect to a radial line from the axis of the shaft through said radially inner end of said face and with respect to the direction of unwinding of the rope from the reel, the pawl has a complementary face for mutual engagement with said face of any one tooth of the ratchet, the pawl is provided with spring-loading means with manually-operable means for changing the effect of the spring loading over between urging the pawl into engagement with the ratchet and towards a position holding the pawl clear of the ratchet, and in that the manually-operable tensioning means is by way of a separate wrench engageable with one end of the shaft. While the reel can accommodate an adequate length of rope; and a separate wrench can have such a length of handle as to enable adequate tension to be applied to each wire or rope, application of the wrench to the cap when placed on a load of a height of, say, two metres is very difficult, even for a person of above average height. Likewise, access to the manually-operable change-over means for the ratchet is very difficult, especially as the change-over cannot be effected without use of the wrench for slight additional tensioning of the wire or rope to free the pawl from the ratchet.

In the other cap each strapping strand is a strap, there being within the respective housing parallel guides between ends of the housing, at one end of which is the opening; a crosshead slidable along the guides towards and away from the opening, the crosshead being mainly constituted by crossbars of graduated diameters; a fixed array of graduated crossbars adjacent the opposite end of the

housing from the crosshead, the axes of the crossbars in the crosshead and the fixed array all being in a common plane with the smallest diameter crossbars being the nearest to each other, the strap having its inner end secured to one of the smallest diameter crossbars and being lapped in multi-purchase array round the other smallest diameter crossbar and each successively greater diameter crossbar in the crosshead and fixed array in turn, and with the final lap of the strap emerging from the opening in the housing, and spring means to urge the crosshead away from the fixed array; the total length of strap that can be accommodated being principally dependent on the number and lengths of laps between the crosshead and the fixed array, and the number of laps being determined by the number of crossbars in the crosshead and in the fixed array (e.g. three crossbars in one and two in the other giving five laps), the diameters of the crossbars can be but a few millimetres each consistent with being strong enough to carry the loads in the strap generated by the spring means, the tensioning means being a lever with an over-centre locking action rotating a slotted crossbar through which the strap passes. The length of strap that can be accommodated is very limited; and the length of the lever and the extent to which it can rotate the slotted crossbar are so limited that adequate tension in the straps is difficult to achieve, especially in view of elasticity/stretchability of the straps.

Therefore, the object of the present invention is to provide a cap for palletised loads with which adequate tension can be applied to the strapping strands by means accessible at all times from the sides of the cap.

According to the present invention, a cap of the type initially defined has each tensioning means comprising a slotted crossbar through which the strapping strand passes, a lever pivoted within the respective side of the cap and movable in a plane

parallel to the general plane of the cap between operative and inoperative positions and linkage between the lever and the slotted crossbar such that movement of the lever from inoperative position to operative position causes rotation of the slotted crossbar to wind the strapping strand round the slotted crossbar, thus enabling tension to be developed in the strapping strand after its hook has been engaged with a pallet, together with manually releasable spring-loaded latch means for securing the strapping strand in tension. Thus the lever is accessible from the respective side of the cap regardless of the height at which the cap is disposed on a load on a pallet.

The latch means may also hold the lever in inoperative position; alternatively, a return spring may be provided to urge the lever to inoperative position.

The axis of rotation of the slotted crossbar may be at the middle of the slot or offset therefrom. The slotted crossbar may be formed by a pair of parallel bars rigidly connected at both ends, and the axis of rotation may be at the middle of one of the bars, whereby the other bar orbits round it.

The extent of rotation of the slotted crossbar, and hence the tension in the strapping strand, may be determined by the mechanical advantage of the lever and the form of linkage between the lever and the slotted crossbar. Thus the linkage may comprise at least one wire or, preferably, wire rope for its strength, flexibility and durability, or substantially non-extensible non-metallic mono-filament or stranded cable (hereinafter referred to simply as "wire", but "wire rope" in the particular embodiment to be described with reference to the accompanying drawings) secured at one end to the lever and secured at the other end to a pulley secured for rotation with the slotted crossbar, movement of the lever from

inoperative position to operative position effecting unwinding of the wire from the pulley to cause winding of the strapping strand round the slotted crossbar; the ratio of the diameter of the pulley to the crossbar thus affords a high mechanical advantage capable of developing high tension in the wire (and hence in the strapping strand after its hook has been engaged with a pallet); with a spring return for re-winding the wire onto the pulley when the lever is moved to effect release of tension in the wire. The wire (or cable) may be formed of metal or of any other substantially inelastic/non-extensible material.

A ratchet mechanism is preferably incorporated in the linkage between the lever and the slotted crossbar, to enable repeated swinging of the lever to-and-fro to effect as many turns of the strapping strand round the slotted crossbar as may be needed for adequate tensioning of the strapping strand and holding that tension.

The lever and ratchet mechanism may be based on a well-known type of device for tensioning a strap for securing a load on a lorry or a strap on a side sheet for protecting a load on a lorry, in which device the strap is wound round a spool between two arms of a bifurcated lever, a ratchet being provided between each end of the spool and the respective adjacent arm, the lever arms and spool and ratchets being mounted on a common pivot in a mounting frame, with the ratchets secured for rotation with the spool and the lever rotatable with respect to the spool and ratchets, a drive plate slidably mounted on the lever, a first spring urging the drive plate into engagement with the ratchet to enable to-and-fro swinging of the lever to wind the strap round the spool and tension it, a second spring urging the latching plate into engagement with the ratchet to latch the ratchet at times when it is not being rotated by driving action of the lever through the drive plate, the drive plate

being manually operable against the first spring to disengage it from the ratchet, and a cam on the lever for disengaging the latching plate from the ratchet after the drive plate has encountered and rides along a radius plate fixed in the mounting to hold the drive plate clear of the ratchet when unwinding of the strap from the spool is required.

Such a device is usually wholly or principally of metal construction, with coil compression springs for the drive plate and the latching plate and could be adapted for incorporation in a cap as described above by, instead of the strap being wound on the spool, a circumferential groove is provided in the spool in which is reeved and wound one end of the wire (or cable) the other end of which is secured to the pulley for effecting rotation of the slotted crossbar on to which the strapping strand is wound.

However, the lever and ratchet mechanism is preferably formed wholly or principally with parts moulded in plastics material, with resulting potential for reducing costs and weight and also number of components.

Therefore, there is preferably provided a bifurcated lever, a spool with a ratchet extending from one end to a circumferential groove adjacent the other end into which the wire (or cable) is reeved, the lever and the spool being rotatable about a fixed common axis in the housing and the lever being rotatable with respect to the spool, a ratchet drive pawl on a first resilient arm mounted in the lever, a latching pawl on a second resilient arm mounted in the housing to latch the ratchet at times when it is not being rotated by the driving action of the lever through the drive pawl, a fixed stop in the housing for limiting swinging of the lever (for example to 90°) from inoperative position, manually operable means for disengaging the drive pawl from

the ratchet, and a cam on the lever for disengaging the latching pawl from the ratchet after the drive pawl has encountered and rides along a fixed radius plate in the housing beyond the stop means.

5 A spring is preferably provided to return the lever to inoperative position automatically, which spring is conveniently a torsion spring coiled about the lever and spool pivot and with end arms abutting projections on the lever and within the housing respectively; thus this spring is, along with the wire reeved to the spool in the circumferential groove, one of the only two metal parts required in the lever and
10 ratchet mechanism.

The manually operable means for disengaging the drive pawl from the ratchet may comprise a slider movable in the lever towards and away from the drive pawl, with a head on a neck passing through a slot in the first resilient arm, the head having lateral projections engaging ramps on each side of the slot when the slider is
15 moved towards the drive pawl; there preferably also being a fixed abutment in the housing spaced from the fixed stop to be engaged by the slider to urge it back towards its inoperative position as the drive pawl rides along the radius plate.

It is preferable to ensure that the latching pawl cannot be unintentionally disengaged from the ratchet (e.g. through vibration during transporting of a capped
20 load on a pallet) and this may be effected by providing a plate or spaced abutments on the lever to lie alongside the second resilient arm when the lever is moved into inoperative position.

Torque limiting means may be incorporated in the lever to ensure that the wire (or cable) cannot be overloaded.

Each strapping strand is preferably a strap having its end remote from the hook secured to the barrel of a drum, with a spring within the drum for retracting the strap when it is free to run through the slotted crossbar. The drum may be on an axis perpendicular to the general plane of the cap, in which case the strap twists through 90° between the drum and the slotted crossbar. Thus each housing need have a depth little more than the height of the drum, which preferably has thin flanges at the ends of its barrel.

Each hook preferably has two prongs spaced apart so as to fit one to each side of a middle spacer of a pallet.

Each opening is preferably provided at the back of a recess in the respective side of the cap of a depth front-to-back to receive fully the respective hook, and the bottom of the recess provided with ramping surfaces to effect automatic parking of the hook into the recess upon retraction of the strap into the housing and retention of the hook against dislodgement if the cap is turned over; and the lever is located within a slot in the respective side of the cap extending from the recess.

To suit different widths of middle spacers in pallets, e.g., standard wooden pallets, euro pallets and specific user pallets, hooks of different sizes may be made available with different spacings between the prongs, for location closely to each side of the respective width spacer, each prong being cranked out from a mid-portion of the hook of a width commensurate with the width of the strap secured around it. Alternatively, a single size of hook may be provided with a spacing between the prongs for location closely to each side of the widest middle spacer in use. Each hook is preferably provided with a bracing bar parallel to the mid-portion to aid placement onto a pallet by the toe of footwear of a user. The bracing bar may

be pulled by the fingers of a user for effecting withdrawal of the hook from its recess; alternatively, the strap may extend beyond the bracing bar for grasping by a user's hand, or the strap may terminate at the mid-portion of the hook and a separate tab
5 provided on the bracing bar.

The bulk of the cap is conveniently formed of plastics material, with a main moulding forming a lower portion, upstanding sides and depending skirt, one or more mouldings forming an upper portion, and with integral wall formations on the
10 upperside of the lower portion defining the housings, and providing axles for the drums and guides for the straps from the drums to the slotted crossbars. The skirt is preferably stepped outwardly from side portions of the cap to enable like caps to be nested with each other and/or with pallets during return transporting as well as to help secure a load on a pallet by embracing the top sides of the load.

The underside of the cap is preferably slightly domed, i.e. it is slightly lower
15 (e.g. by 6.0 mm) at the corners than at the centre, or is provided with pads (e.g. 120.0 mm square and 6.0 mm thick) adjacent the corners, so that with strapping strands at the middle of sides of the cap under tension tending to cause bowing, the doming or pads will distribute the loading of the cap more evenly across the top of the load on the pallet to which the cap is applied and the straps are hooked
20 respectively.

Each set of lever, spool, slotted crossbar, etc. together with recess and ramping surfaces may be provided in a cassette having a chassis and a cover, with upstanding formations on the chassis and depending formations on the cover mating to form bearings for the slotted crossbar and pulley.

The centre of the upper portion of the cap may be provided with an opening spanned by a bar handle, to facilitate manual handling of the cap by one hand of an operator, particularly onto and off loads on pallets, the central opening preferably being located above a continuous wall upstanding from the lower portion, to prevent water or dirt entering the space between the mouldings occupied by the strapping mechanisms; alternatively, or in addition, one or more handholds may be provided at each side of the cap, or on top adjacent each corner, to allow the other hand of an operator to steady or control manipulative movement of the cap, e.g. a slot in each side of the skirt; or the skirt round all sides of the cap may suffice as a handhold anywhere convenient.

While a cap with two strapping strands may suffice for use with a 2-way pallet or a 4-way pallet, a cap according to the present invention may have four strapping strands especially for use with a 4-way pallet but capable of being used with a 2-way pallet by utilising only two opposite strapping strands or all four.

An embodiment of the invention and a modification thereof will now be described, by way of example only, with reference to the accompanying drawings in which:-

Figure 1 is a view from above of a cap in accordance with the invention;

Figure 2 is an underneath view of the cap of Figure 1;

Figure 3 shows the cap of Figures 1 and 2 in use securing a load on a pallet;

Figure 4 is a fragmentary view showing in more detail one of the hooks seen in Figure 3 engaged with the platform of the pallet;

Figure 5 is a view from above of the main moulding forming the lower portion of the cap;

Figure 6 is an underneath view of one of the two mouldings forming the upper portion of the cap;

Figure 7 is a view from below of the handle member seen in Figures 1 and 3 secured between the mouldings forming the lower and upper portions of the cap;

Figure 8 is a fragmentary view showing the handle member in place in the main moulding;

Figure 9 is a view from above of a form of cassette fitting into two (or more) opposite housings in the main moulding seen in Figure 5;

Figure 10 corresponds to Figure 9 but with the cover of the cassette removed and the mechanism in operative condition;

Figure 11 is a view from above of the chassis of the cassette of Figures 9 and 10;

Figure 12 is an underneath view of the cover of the cassette;

Figure 13 is a view from above of the drum seen in Figures 9 and 10;

Figure 14 is a fragmentary view showing part of the drum with a portion of its cover broken away to show a strap attached thereto and partially wound thereon, and also showing a rewind spring for the drum;

Figure 15 is a view of the spindle seen in Figures 9 and 10 as viewed in an opposite direction;

Figure 16 is a view of a rewind spring for the spindle;

Figure 17 is a view from the front and above of a lever seen in Figures 1 to 3 and Figures 9 and 10;

Figure 18 is an underneath view of the lever;

Figure 19 is a view from the front and below of the release slider seen in previous views of the lever;

Figure 20 is the opposite view of the release slider;

5 Figure 21 is a view from the rear and below of a driving pawl for incorporation in the lever;

Figure 22 is a view from the rear of the lever with the release slider and driving pawl incorporated;

10 Figure 23 corresponds to Figure 22 but shows the slider in its pawl-releasing position;

Figure 24 is a view from below of a spool with a ratchet for incorporation in the lever;

Figure 25 is a view of a return spring for the lever;

15 Figure 26 is a view of a cable with ferrules for attachment to the spindle and spool respectively;

Figure 27 is a fragmentary horizontal section through the lever showing the lever and ratchet mechanism in inoperative condition;

Figure 28 corresponds to Figure 27 but shows the lever and ratchet mechanism in operative condition;

20 Figure 29 corresponds to Figures 27 and 28 but shows the lever and ratchet mechanism in drive pawl-releasing condition; and

Figure 30 corresponds to Figure 29 but shows the lever and ratchet mechanism in latching pawl-releasing condition;

25 The cap 1 shown in Figures 1 and 2 is for use in securing palletized loads, such a load 2 being shown in Figure 3 secured on a pallet 3 by the cap, which has a

lower portion 4 with upstanding sides 5 and depending skirt 6 (for embracing the top sides of the load) (and also enabling caps to be nested with each other or with pallets) formed by a main plastics moulding (see also Figure 5) and an upper portion 7 shown formed by two plastics mouldings 8 (see also Figure 6), but which could be formed as a single moulding, in which case there would not be mating edges at the lines 9.

Integral wall formations 10 on the upperside of the lower portion 4 of the cap define housings 11 for cassettes 12 (see Figures 9 to 12) containing retractable straps 13 on free ends of which are hooks 14 (see also Figure 4) each having two prongs 15 spaced apart so as to fit one to each side of a middle spacer 17 of a pallet (see particularly Figure 4) with the prongs engaging the underside of the platform 18 of the pallet, so that the straps 13 can be tensioned by mechanisms within the cassettes (to be described in detail presently) upon operation of levers 19 which can be seen, along with the retracted hooks 14, in Figures 1 and 2 in gaps 20 in the sides 5 of the lower portion/main moulding 4.

The hook 14 is provided with a bracing bar 16 parallel to a mid-portion 14M of the hook to which the strap is secured, to aid placement on to a pallet by the toe of footwear of a user, and a tab 13A formed by a portion of strap is secured to the bracing bar to extend beyond the side 5 of the cap 1 for grasping by a user's hand, for withdrawal of the hook and strap from the cap.

Figures 1 to 3 indicate the inclusion of straps 13 and levers 19 (in cassettes 12) on all four sides 5, but two straps, etc., on opposite sides may suffice, in which case the gaps 20 in the other two opposite sides can be closed by blanking-off strips, not shown.

A central pocket 21 (see Figure 5) is formed in the main moulding 4 by two upstanding wall formations 22 between portions 10A of the wall formations 10, and notches 23 are provided in the wall formations 22 to receive an I-shaped handle 24 (see also Figures 7 and 8) which is accessible through an opening 25 formed between the mouldings 8. Further pockets 26 are formed by further upstanding wall formations 27 near the corners 28 of the main moulding 4 to register with openings 29 in the mouldings 8 to provide additional handholds for steadying the cap 1 when being placed on or lifted off a load by a hand grasping the handle 24.

The mouldings 8 are secured by screws 30, 31 into pairs of pillars 32, 33 respectively within the housings 11 in the moulding 4, and the pairs of pillars 32 also serve to locate the cassettes 12, as will be described presently. Depending formations 34 on the underside of the mouldings 8 interdigitate with further upstanding formations 35 within the housings 11 to stiffen the assembled cap. Raised areas 36 are provided on the mouldings 8 for location within the base of another pallet (not shown) placed on the cap.

Tensioning means for each strap 13 comprises a crossbar 37 (see Figures 9 and 15) with a slot 38 through which the strap 13 passes, and linkage 39 to the lever 19 whereby movement of the lever from inoperative position 19(A) (Figures 9 and 27) to operative position 19(B) (Figures 10 and 28) causes rotation of the slotted crossbar, to effect winding of the strap round the crossbar, as is evident at 13W in Figure 10, thus enabling tension to be developed in the strap after the prongs 15 of its hook 14 have been engaged with a pallet.

The linkage 39 will now be described in detail.

The slotted crossbar 37 is provided at one end of a spindle 40 having journals 41, one adjacent each end of the slot 38 and a third at the other end of the spindle, adjacent a pulley 42. A chassis 43 of each cassette 12 (see particularly Figure 11) is provided with upstanding half-bearings 44 for the journals 41 and a cover 45 of the cassette (see particularly figure 12) has the other halves 46 of the bearings depending therefrom. The chassis 43 has hollow upstanding formations 47 for location on the pillars 32 on the main mouldings 4 of the cap 1. A coil spring 48 (Figures 9, 10 and 16) encircles a ribbed portion 49 (Figure 15) of the spindle and has a limb 50 at one end to engage a small hook-like projection 51 on the pulley, while a bent limb 52 on the other end engages a recess (not visible) in the base of chassis, the spring 48 being effective to urge the slotted crossbar 37 to the position shown in Figure 9 when tension in the strap 13 is to be released.

A wire rope 53 (Figures 10 and 26) has a ferrule 54 at one end for engagement in a socket 55 in the pulley 42, and the wire rope has a number of turns wound on the pulley (as indicated in Figures 9 and 10), while the other end of the wire rope is provided with a ferrule 56 for engagement in a counterbore 57 in a bore 57A opening into a groove 58 adjacent one end of a spool 59 (see Figure 24) having a ratchet 60 extending from the other end to the groove. The spool is rotatable along with and with respect to the lever 19 on a fixed common axis 61 provided by pivot portions 62A, 62B on the chassis 43 and the cover 45 respectively, the lever being bifurcated to provide upper and lower flanks 63, 64 respectively (see particularly Figures 17, 18, 22 and 23) between which the spool 59 is disposed. The upper flank 63 of the lever 19 has a projection 65 for engagement by a limb 66 at one end of a coil spring 67 (see Figure 25), while the underside of the cover 45 of

the cassette has a projection 68 for engagement by a limb 69 at the other end of the spring 67, the spring thereby being effective to urge the lever 19 towards inoperative position, in which position a bar 70 on the underside of the lever 19 abuts a bar 71 on the base of the chassis 43.

The lever 19 contains a drive pawl 72 (see Figures 21 to 23 and 27 to 30) for the ratchet 60 on a first resilient arm 73, while the chassis 43 carries a latching pawl 74 (see also Figures 10 and 11) on a second resilient arm 75 so that when the lever 19 is oscillated between the positions shown in Figures 9 and 10 (or Figures 27 and 28) the drive pawl rotates the ratchet/spool 59 to wind the wire rope 53 into the groove 58 in the spool, thus winding the wire rope from the pulley 42 and, therefore, rotating the spindle 40 to wind the strap 13 on to the slotted crossbar 37 (as seen at 13W in Figure 10), and the latching pawl 74 holds the ratchet/spool while the lever 19 returns, under the urge of the spring 67 to the position shown in Figure 9. The lever 19 has two spaced abutment portions 76 to lie alongside the second resilient arm 75 when the lever is moved into the position shown in Figure 9, to ensure that the latching pawl 74 cannot be unintentionally disengaged from the ratchet 60 through vibration during transporting of a capped load on a pallet

Further details of the lever 19 and their purpose will be described later with particular reference to Figures 27 to 30 in addition to Figures 17 to 23.

Each strap 13 has its end 77 remote from the hook 14 secured to the barrel 78 of a drum 79 (see Figures 9 to 11, 13 and 14) on an axis 80 perpendicular to the general plane of the cap 1, with a clock spring 81 within the drum for retracting the strap when it is free to run through the slotted crossbar 37, i.e., when in the position shown in Figure 9, and the strap twists through 90° between the drum and the

slotted crossbar after turning round a guide post 82. Thus each housing 11 has a depth little more than the height of the drum 79, which has thin flanges 83A, 83B, the former being formed integrally with the drum while the latter is formed by a peripheral margin of a cover 84 with a snap-fitting (not visible) to the barrel of the drum, a cut-out 85 being formed in the cover for insertion or removal of the strap end 77 to or from an anchor post 86 within the barrel 78.

From the slotted crossbar 37 the strap 13 passes through an opening 87 provided at the back of a recess 88 of a depth front-to-back in the side 5 of the cap 1 to fully receive the respective hook 14, and the bottom of the recess is provided with ramping surfaces 89, 90 to effect automatic parking of the hook into the recess upon retraction of the strap into the housing and retention of the hook against dislodgement if the cap 1 is turned over, and the lever 19 is located, when in inoperative position, within a slot 91 in the respective side 5 of the cap extending from the recess. It will be evident that the recess 88 constitutes stop means for limiting retraction of the hook 14 into the housing 11 when not engaged with a pallet.

Depending V-shaped spring fingers 92 (see figures 9 and 12) on the cover 45 of the cassette 12 make snap engagement with projections 93 on the chassis 43 and an inverted V-shaped spring finger 94 upstanding from the chassis 43 makes snap engagement with a projection that is not visible being on the far side of an L-shaped post 95 (Figure 12) depending from the cover, to secure the cover on the chassis after the lever and ratchet mechanism etc has been inserted. Spring fingers 96 on the chassis 43 make snap engagement with notches 97 in the walls 10 of the main moulding 4 of the cap 1 at the ends of the gaps 20 (see particularly Figure 5).

Turning now to Figures 17 to 23, the first resilient arm 73 carrying the drive pawl 72 is divided by a long slot 98 and the divided ends 99 are a snap-fit into a block 100 formed integrally within the lever 19, but only after insertion of a slider 101 through an aperture 102 in the outer face 103 of the lever, the slider having an angled corner 104 matching one side 105 of a V-shaped end to the aperture 102 to facilitate insertion of the slider. The slider is provided with a head 106 on a neck 107 passing through the slot 98 in the arm 73, the divided ends 99 of the arm 73 being inserted either side of the neck on the already inserted slider and then into the block 100. The head 106 has lateral projections 108 engaging ramps 109 on each side of the slot 98 when the slider is moved towards the drive pawl 72 to disengage the drive pawl from the ratchet 60.

With the slider in the position shown in Figures 17 and 22 and as also in Figures 27 and 28, the drive pawl 72 is in engagement with the ratchet, thus enabling the lever 19 to be swung repeatedly between the positions 19(A), 19(B) to rotate the spool 59, the position 19(B) being determined by the drive pawl meeting a fixed stop 110 (see also Figure 11) on the base of the chassis projecting up through an arcuate slot 111 in the lower flank 64 of the lever, the actual contact being between the stop and a small heel 112 projecting downwards from the drive pawl 72.

The stop 110 is at one end of a radius plate 113 along which the shoe runs when with the slider 101 moved to the position shown in Figures 23 and 29 the lateral projections 108 of the head 106 engage the ramps 109 on the resilient arm 73 to flex it and disengage the drive pawl 72 from the ratchet 60, and the lever is moved towards a position 19(C) shown in Figure 30 causing two things to happen. Firstly, the leading edge 114 of the slider 101 meets a fixed abutment 115 on the

base of the chassis spaced from the fixed stop 110 to urge the slider back towards its inoperative position, and, secondly, cam surfaces 116 on the lever 19 flex the second resilient arm 75 to disengage the latching pawl 74 from the ratchet.

5 The consequence of this latter interaction is that the coil spring 48 round the spindle 40 rotates the spindle to rewind the wire rope 53 on to the pulley 42 and, therefore, unwind it from the ratchet spool 59, and also rotate the slotted crossbar 37 to release the tension in the strap 13 thus allowing the hook 14 to be pulled clear from the platform 18 of the pallet 3. When the slotted crossbar has returned to the
10 position shown in Figure 9 and the strap has been completely unwound from it, the strap is then free to be rewound on to the drum 79 by the clock spring 81 and the hook 14 drawn back into the recess 88, guided by the ramping surfaces 89, 90.

 Finally, when the lever 19 is released by the user, the coil spring 67 returns the lever to the position shown in Figures 9 and 27.

15 The mechanism shown in the cassette 12 is capable of generating in the strap 13 tension of the order of 175 kgs with but a few oscillations of the lever 19, the effort applied to which when moving it from inoperative position 19(A) to operative position 19(B) will at first be very slight as the first turn of the slotted crossbar 37 takes up slack in the strap 13. The return spring 81 in the drum 79
20 plays no part in generating the tension in the strap 13, and its loading is so slight that it offers little resistance to winding of the strap around the slotted crossbar. Because winding of the strap around the slotted crossbar occurs from both directions, as indicated by the arrows on the strap in Figure 10, the build-up of turns on the slotted crossbar is rapid and the effort needed to move the lever from inoperative position to

operative position increases with each oscillation until resistance to further driving movement indicates that adequate tension has been generated in the strap.

The underside 117 (see Figure 2) of the lower portion 4 of the cap 1 is preferably slightly domed, i.e. it is slightly lower (e.g. by 6.0 mm) at the corners than at the centre, so that, with straps 13 at the middle of the sides 5 of the cap under tension tending to cause bowing, the doming will distribute the loading of the cap more evenly across the top of the load 2 on the pallet 3 to which the cap is applied and the straps are hooked respectively. However, because the doming is so slight it cannot be illustrated, but an alternative of pads 118 is shown in broken lines in Figure 2, which pads may be, say, 120.0 mm square and of 6.0 mm thickness.

Although, as mentioned previously, the provision of strapping strands, hooks and tensioning mechanisms in cassettes affords the option of incorporating one pair or two pairs of cassettes in a cap for use on pallets of, say, 1000.0mm by 800.0mm, for use with smaller pallets the cap may be of a size incapable of accommodating tensioning mechanisms for more than two strapping strands and hooks at a single pair of opposite sides of the cap, in which case formations described previously as upstanding from the chassis 43 of the cassette 12 could be upstanding directly from each of only two housings in the lower portion (or main moulding) of the smaller cap, and formations previously described as depending from the cover 45 of the cassette could depend directly from a unitary upper portion of the cap, with consequent saving in quantity, weight and cost of moulded components.

CLAIMS

1. A cap for use on palletised loads, the cap being of the type having at least two strapping strands retractable into housings through openings at opposite sides of the cap, spring means within the housings for retracting the strapping strands, hooks on the free ends of the strapping strands for engagement with the underside of the platform of a pallet, tensioning means within the housings for tightening the strapping strands between the cap and the pallet after interposing a load between the cap and the pallet, and stop means for limiting retraction of the hooks into the housings when not engaged with a pallet, characterized in that each tensioning means comprises a slotted crossbar through which the strapping strand passes, a lever pivoted within the respective side of the cap and movable in a plane parallel to the general plane of the cap between operative and inoperative positions, and linkage between the lever and the slotted crossbar such that movement of the lever from inoperative position to operative position causes rotation of the slotted crossbar to wind the strapping strand round the slotted crossbar, thus enabling tension to be developed in the strapping strand after its hook has been engaged with a pallet, together with manually releasable spring-loaded latch means for securing the strapping strand in tension.

2. A cap as in Claim 1, characterized in that the latch means also holds the lever in inoperative position.

3. A cap as in Claim 1, characterized in that a return spring urges the lever to inoperative position.

4. A cap as in any one of Claims 1 to 3, characterized in that the axis of rotation of the slotted crossbar is at the middle of the slot.

5. A cap as in any one of Claims 1 to 3, characterized in that the slotted crossbar is formed by a pair of parallel bars rigidly connected at both ends.

6. A cap as in Claim 5, characterized in that the axis of rotation is at the middle of one of the bars, whereby the other bar orbits round it.

7. A cap as in any one of Claims 1 to 6, characterized in that the linkage comprises at least one wire secured at one end to the lever and secured at the other end to a pulley secured for rotation with the slotted crossbar, movement of the lever from inoperative position to operative position effecting unwinding of the wire from the pulley to cause winding of the strapping strand round the slotted crossbar, and with a spring return for re-winding the wire onto the pulley when the lever is moved to effect release of tension in the wire.

8. A cap as in any one of Claims 1 to 7, characterized in that a ratchet mechanism is incorporated in the linkage between the lever and the slotted crossbar, to enable repeated swinging of the lever to-and-fro to effect as many turns of the strapping strand round the slotted crossbar as may be needed for adequate tensioning of the strapping strand and hold the tension.

9. A cap as in Claim 8, characterized in that the lever and ratchet mechanism is in the form of a well-known type of device for tensioning a strap for securing a load on a lorry or a strap on a side sheet for protecting a load on a lorry, in which device the strap is wound round a spool between two arms of a bifurcated lever, a ratchet being provided between each end of the spool and the respective adjacent arm, the lever arms and spool and ratchets being mounted on a common pivot in a mounting frame, with the ratchets secured for rotation with the spool and the lever rotatable with respect to the spool and ratchets, a drive plate slidably

mounted on the lever, a first spring urging the drive plate into engagement with the ratchet to enable to-and-fro swinging of the lever to wind the strap round the spool and tension it, a second spring urging the latching plate into engagement with the ratchet to latch the ratchet at times when it is not being rotated by driving action of the lever through the drive plate, the drive plate being manually operable against the first spring to disengage it from the ratchet, and a cam on the lever for disengaging the latching plate from the ratchet after the drive plate has encountered and rides along a radius plate fixed in the mounting to hold the drive plate clear of the ratchet when unwinding of the strap from the spool is required, further characterized in that instead of the strap being wound on the spool, a circumferential groove is provided in the spool in which is reeved and wound one end of the wire the other end of which is secured to the pulley for effecting rotation of the slotted crossbar on to which the strapping strand is wound.

10. A cap as in Claim 8 or Claim 9, characterized in that the lever and ratchet mechanism is made wholly or principally of metal.

11. A cap as in Claim 8 or Claim 9, characterized in that there is provided a lever and ratchet mechanism made wholly or principally of plastics material.

12. A cap as in Claim 8 or Claim 11, characterized in that there is provided a bifurcated lever, a spool with a ratchet extending from one end to a circumferential groove adjacent the other end into which the wire is reeved, the lever and the spool being rotatable about a fixed common axis in the housing and the lever being rotatable with respect to the spool, a ratchet drive pawl on a first resilient arm mounted in the lever, a latching pawl on a second resilient arm mounted in the housing to latch the ratchet at times when it is not being rotated by the driving action

of the lever through the drive pawl, a fixed stop in the housing for limiting swinging of the lever from inoperative position, manually operable means for disengaging the drive pawl from the ratchet, and a cam on the lever for disengaging the latching pawl from the ratchet after the drive pawl has encountered and rides along a fixed radius plate in the housing beyond the stop means.

13. A cap as in Claim 12 in combination with Claim 3, characterized in that the return spring is a torsion spring coiled about the lever and spool pivot and with end arms abutting projections on the lever and within the housing respectively.

14. A cap as in Claim 12 or Claim 13, characterized in that the manually operable means for disengaging the drive pawl from the ratchet comprises a slider movable in the lever towards and away from the drive pawl, with a head on a neck passing through a slot in the first resilient arm, the head having lateral projections engaging ramps on each side of the slot when the slider is moved towards the drive pawl.

15. A cap as in Claim 14, characterized in that there is provided a fixed abutment in the housing spaced from the fixed stop to be engaged by the slider to urge it back towards its inoperative position as the drive pawl rides along the radius plate.

16. A cap as in any one of Claims 12 to 15, characterized in that there is provided a plate or spaced abutments on the lever to lie alongside the second resilient arm when the lever is moved into inoperative position, to ensure that the latching pawl cannot be unintentionally disengaged from the ratchet.

17. A cap as in any one of Claims 12 to 16, characterized in that torque limiting means is incorporated in the lever to ensure that the wire cannot be overloaded.

5 18. A cap as in any one of Claims 1 to 17, characterized in that each strapping strand is a strap having its end remote from the hook secured to the barrel of a drum, with a spring within the drum for retracting the strap when it is free to run through the slotted crossbar.

10 19. A cap as in Claim 18, characterized in that the drum is on an axis perpendicular to the general plane of the cap and the strap twists through 90° between the drum and the slotted crossbar.

20. A cap as in Claim 19, characterized in that each housing has a depth little more than the height of the drum.

15 21. A cap as in Claim 20, characterized in that the drum has thin flanges at the ends of its barrel.

22. A cap as in any one of Claims 1 to 21, characterized in that each hook has two prongs spaced apart so as to fit one to each side of a middle spacer of a pallet.

20 23. A cap as in any one of Claims 1 to 22, characterized in that each opening is provided at the back of a recess in the respective side of the cap of a depth front-to-back to receive fully the respective hook, and the bottom of the recess provided with ramping surfaces to effect automatic parking of the hook into the recess upon retraction of the strap into the housing and retention of the hook against dislodgement when the cap is turned over; and the lever is located within a slot in
25 the respective side of the cap extending from the recess.

24. A cap as in any one of Claims 1 to 23, characterized in that to suit different widths of middle spacers in pallets different sizes of hook may be made available with different spacings between the prongs, for location closely to each side of the respective width spacer, each prong being cranked out from a mid-portion of the hook of a width commensurate with the width of the strap secured around it.

25. A cap as in any one of Claims 1 to 23, characterized in that to accommodate different widths of middle spacers in pallets a single size of hook is provided with a spacing between the prongs for location closely to each side of the widest middle spacer in use.

26. A cap as in Claim 24 or Claim 25, characterized in that each hook is provided with a bracing bar parallel to the mid-portion to aid placement onto a pallet by the toe of footwear of a user.

27. A cap as in Claim 26, characterized in that the strap extends beyond the bracing bar for grasping by a user's hand for effecting withdrawal of the hook from its recess.

28. A cap as in Claim 26, characterized in that the strap terminates at the mid-portion of the hook and a separate tab is provided on the bracing bar for grasping by a user's hand for effecting withdrawal of the hook from its recess.

29. A cap as in any one of Claims 1 to 28, characterized in that the bulk of the cap is formed of plastics material, with a main moulding forming a lower portion, sides and a skirt, one or more mouldings forming an upper portion, and with integral wall formations on the upperside of the lower portion defining the housings.

30. A cap as in Claim 29, characterized in that the skirt is stepped outwardly from side portions of the cap to enable like caps to be nested with each other and/or with pallets during return transporting as well as to help secure a load on a pallet by embracing the top sides of the load.

31. A cap as in Claim 29 of Claim 30, characterized in that the centre of the upper portion of the cap is provided with an opening spanned by a bar handle, to facilitate manual handling of the cap, particularly onto and off loads on pallets, the central opening being located above a continuous wall upstanding from the lower portion, to prevent water or dirt entering the space between the mouldings occupied by the strapping mechanisms.

32. A cap as in Claim 30 or Claim 31, characterized in that one or more handholds are provided at each side of the cap.

33. A cap as in Claim 32, characterized in that a handhold is provided adjacent each corner.

34. A cap as in any one of Claims 29 to 31, characterized in that a slot is provided in each side of the skirt.

35. A cap as in any one of Claims 1 to 34, characterized in that two strapping strands are provided for use with a 2-way or 4-way pallet.

36. A cap as in any one of Claims 1 to 34, characterized in that four strapping strands are provided especially for use with a 4-way pallet but capable of being used with a 2-way pallet by utilising only two opposite strapping strands or all four.

37. A cap as in any one of Claims 1 to 36, characterized in that the underside of the cap is slightly domed, being slightly lower at the corners than at the

centre, so that with strapping strands at the middle of sides of the cap under tension tending to cause bowing, the doming will distribute the loading of the cap more evenly across the top of the load on the pallet to which the cap is applied and the straps are hooked respectively.

38. A cap as in any one of Claims 1 to 36, characterized in that the underside of the cap is provided with pads adjacent the corners, so that with strapping strands at the middle of sides of the cap under tension tending to cause bowing, the pads will distribute the loading of the cap more evenly across the top of the load on the pallet to which the cap is applied and the straps are hooked respectively.

39. A cassette for incorporation in a cap for use on palletized loads, the cassette comprising a chassis and a cover, a strapping strand retractable into the cassette through an opening in the cassette, spring means within the cassette for retracting the strapping strand, a hook on the free end of the strapping strand for engagement with the underside of the platform of a pallet, stop means for limiting retraction of the hook into the cassette when not engaged with a pallet, and tensioning means within the cassette for tightening the strapping strand after interposing a load between a pallet and a cap incorporating the cassette, the tensioning means comprising a slotted crossbar through which the strapping strand passes, a lever pivoted within a side of the cassette and movable in a plane parallel to the general plane of the cassette between operative and inoperative positions, and linkage between the lever and the slotted crossbar such that movement of the lever from inoperative position to operative position causes rotation of the slotted crossbar to wind the strapping strand round the slotted crossbar, together with

manually releasable spring-loaded latch means for securing the strapping strand in tension.

40. A cassette as in Claim 39, characterized in that a return spring is provided to urge the lever to inoperative position.

41. A cassette as in Claim 39 or Claim 40 characterized in that the axis of rotation of the slotted crossbar is at the middle of the slot.

42. A cassette as in Claim 41, characterized in that the slotted crossbar is part of a spindle having journals for rotation in bearings formed between upstanding formations on the chassis and depending formations on the cover.

43. A cassette as in Claim 42, characterized in that a pulley is also provided as part of the spindle, and a wire is secured at one end to the lever and at the other end to the pulley, about which the wire is wound, movement of the lever from inoperative position to operative position effecting unwinding of the wire from the pulley to cause winding of the strapping strand round the slotted crossbar, together with a return spring for re-winding the wire onto the pulley when the spring-loaded latch means is manually released to release tension in the wire.

44. A cassette as in any one of Claims 39 to 43, characterized in that a ratchet mechanism is incorporated in the linkage between the lever and the slotted crossbar, to enable repeated swinging of the lever to-and-fro to effect as many turns of the strapping strand round the slotted crossbar as may be needed for adequate tensioning of the strapping strand.

45. A cassette as in Claim 44 in combination with Claim 43, characterized in that the lever is bifurcated and there is provided a spool with a ratchet extending from one end to a circumferential groove adjacent the other end into which the wire

from the pulley is reeved. The lever and the spool being rotatable about a fixed common axis in the cassette and the lever being rotatable with respect to the spool, a ratchet drive pawl on a first resilient arm mounted in the lever, a latching pawl on a second resilient arm mounted in the chassis to latch the ratchet at times when it is not being rotated by the driving action of the lever through the drive pawl, a fixed stop on the chassis for limiting swinging of the lever from inoperative position, manually operable means on the lever for disengaging the drive pawl from the ratchet, and a cam on the lever for disengaging the latching pawl from the ratchet after the drive pawl has encountered and rides along a fixed radius plate on the chassis beyond the stop means.

46. A cassette as in Claim 45, characterized in that a return spring for the lever is in the form of a torsion spring coiled about the lever and spool pivot and with end arms abutting projections on the lever and cover respectively.

47. A cassette as in Claim 45 or Claim 46, characterized in that the manually operable means for disengaging the drive pawl from the ratchet comprises a slider movable in the lever towards and away from the drive pawl, with a head on a neck passing through a slot in the first resilient arm, the head having lateral projections engaging ramps on each side of the slot when the slide is moved towards the drive pawl.

48. A cassette as in Claim 47, characterized in that a fixed abutment is provided on the chassis spaced from the fixed stop to be engaged by the slider to urge it back towards its inoperative position as the drive pawl rides along the radius plate.

49. A cassette as in any one of Claims 39 to 48, characterized in that the strapping strand is a strap having its end remote from the hook secured to the barrel of a drum, with a spring within the drum for retracting the strap when it is free to run through the slotted crossbar.

50. A cassette as in Claim 49 characterized in that the drum is on an axis perpendicular to the general plane of the cassette and the strap twists through 90° between the drum and the slotted crossbar.

51. A cassette as in Claim 50, characterized in that the drum has thin flanges at the ends of its barrel.

52. A cassette as in any one of Claims 39 to 51, characterized in that the opening in the cassette for passage of the strapping strand is at the back of a recess in the cassette of a depth front-to-back to receive fully the respective hook, and the bottom of the recess is provided with ramping surfaces to effect automatic parking of the hook into the recess upon retraction of the strapping strand into the cassette.

53. A cassette as in any one of Claims 39 to 52, characterized in that the hook has two prongs spaced apart for location to each side of a middle spacer of a pallet and cranked out from a mid-portion of the hook commensurate with the width of the strapping strand secured around it.

54. A cassette as in Claim 53, characterized in that the hook is provided with a bracing bar parallel to the mid-portion to aid placement on to a pallet by the toe of footwear of a user.

55. A cassette as in Claim 54, characterized in that the strapping strand extends beyond the bracing bar for grasping by a user's hand.

56. A cassette as in Claim 54, characterized in that the strapping strand terminates at the mid-portion of the hook and a separate tab is provided on the bracing bar for grasping by a user's hand.

5 57. A cap for use on palletized loads substantially as hereinbefore described with reference to the accompanying drawings.

58. A cassette substantially as hereinbefore described with reference to Figures 9 to 30 of the accompanying drawings.

1/18

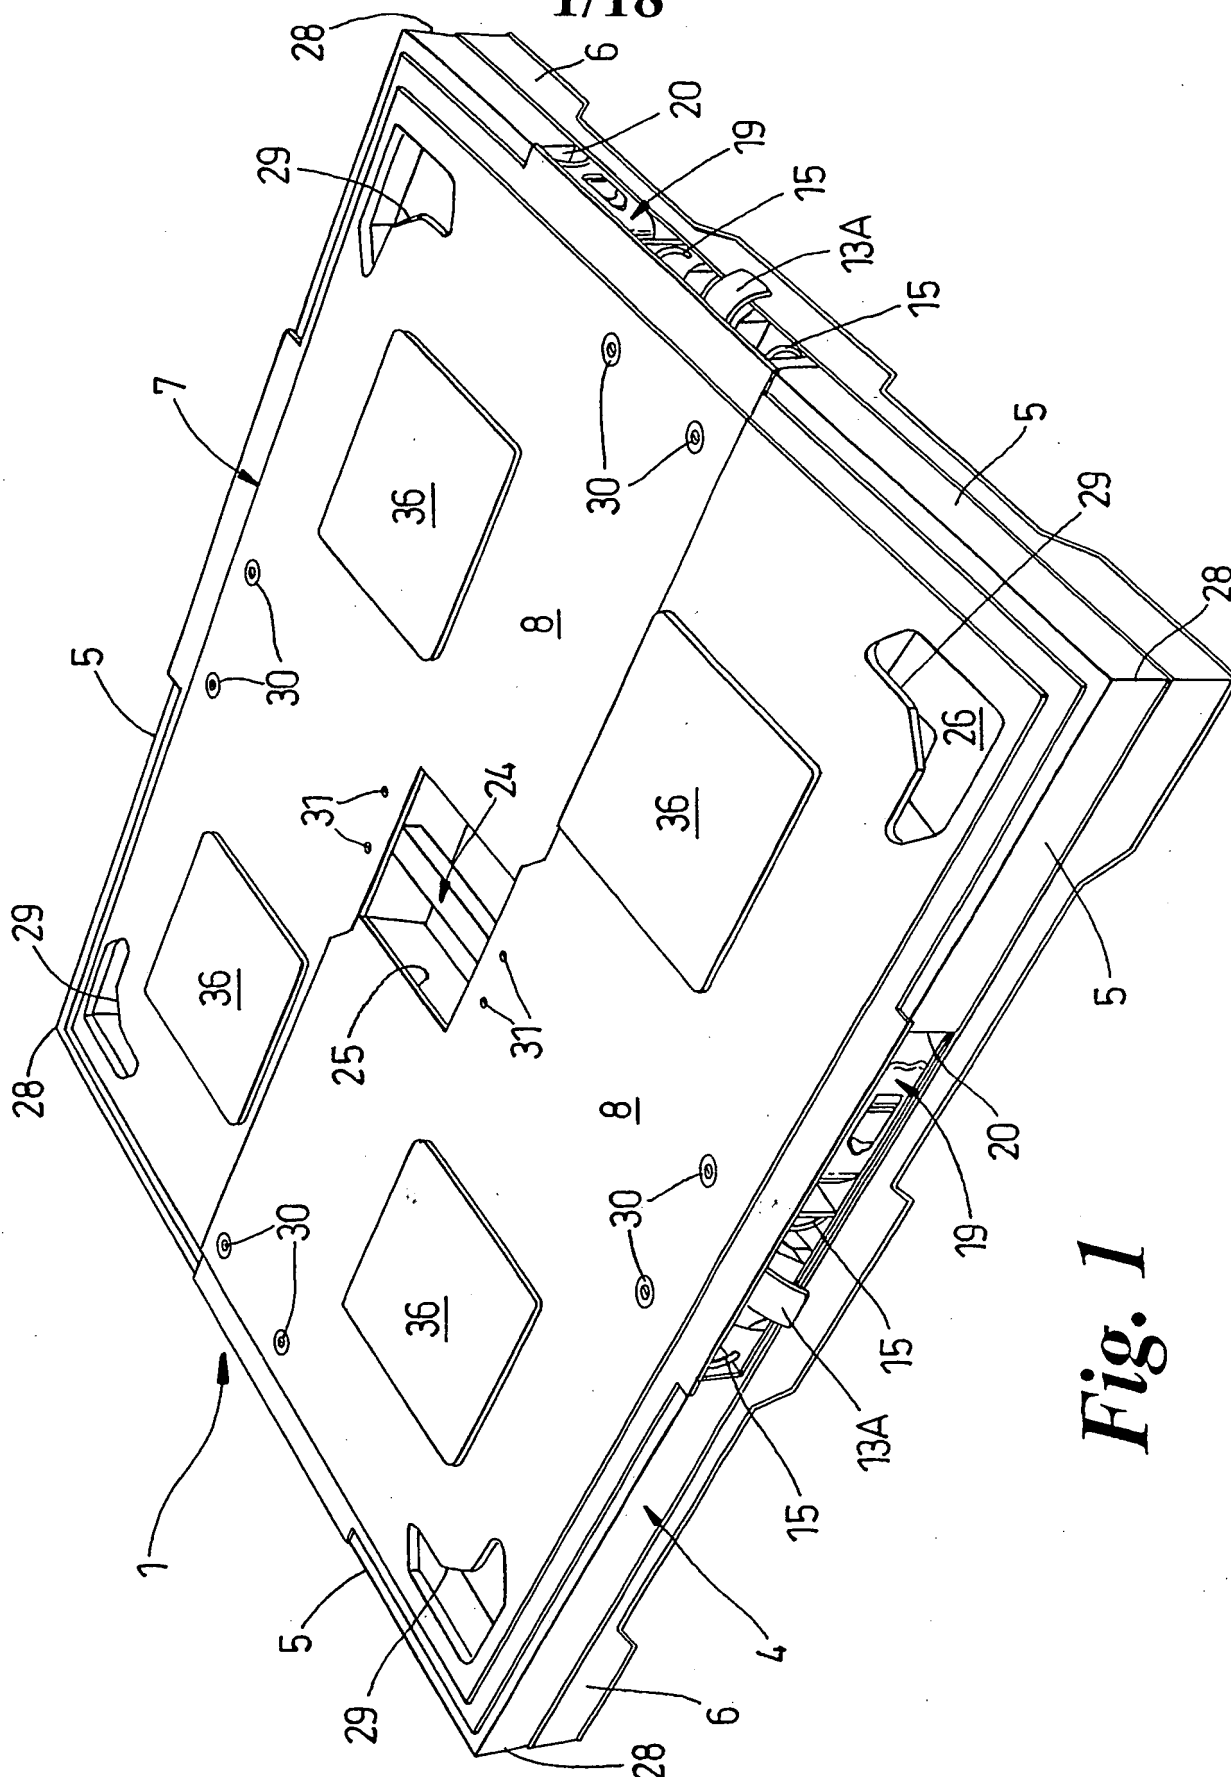


Fig. 1

THIS PAGE BLANK (USPTO)

2/18

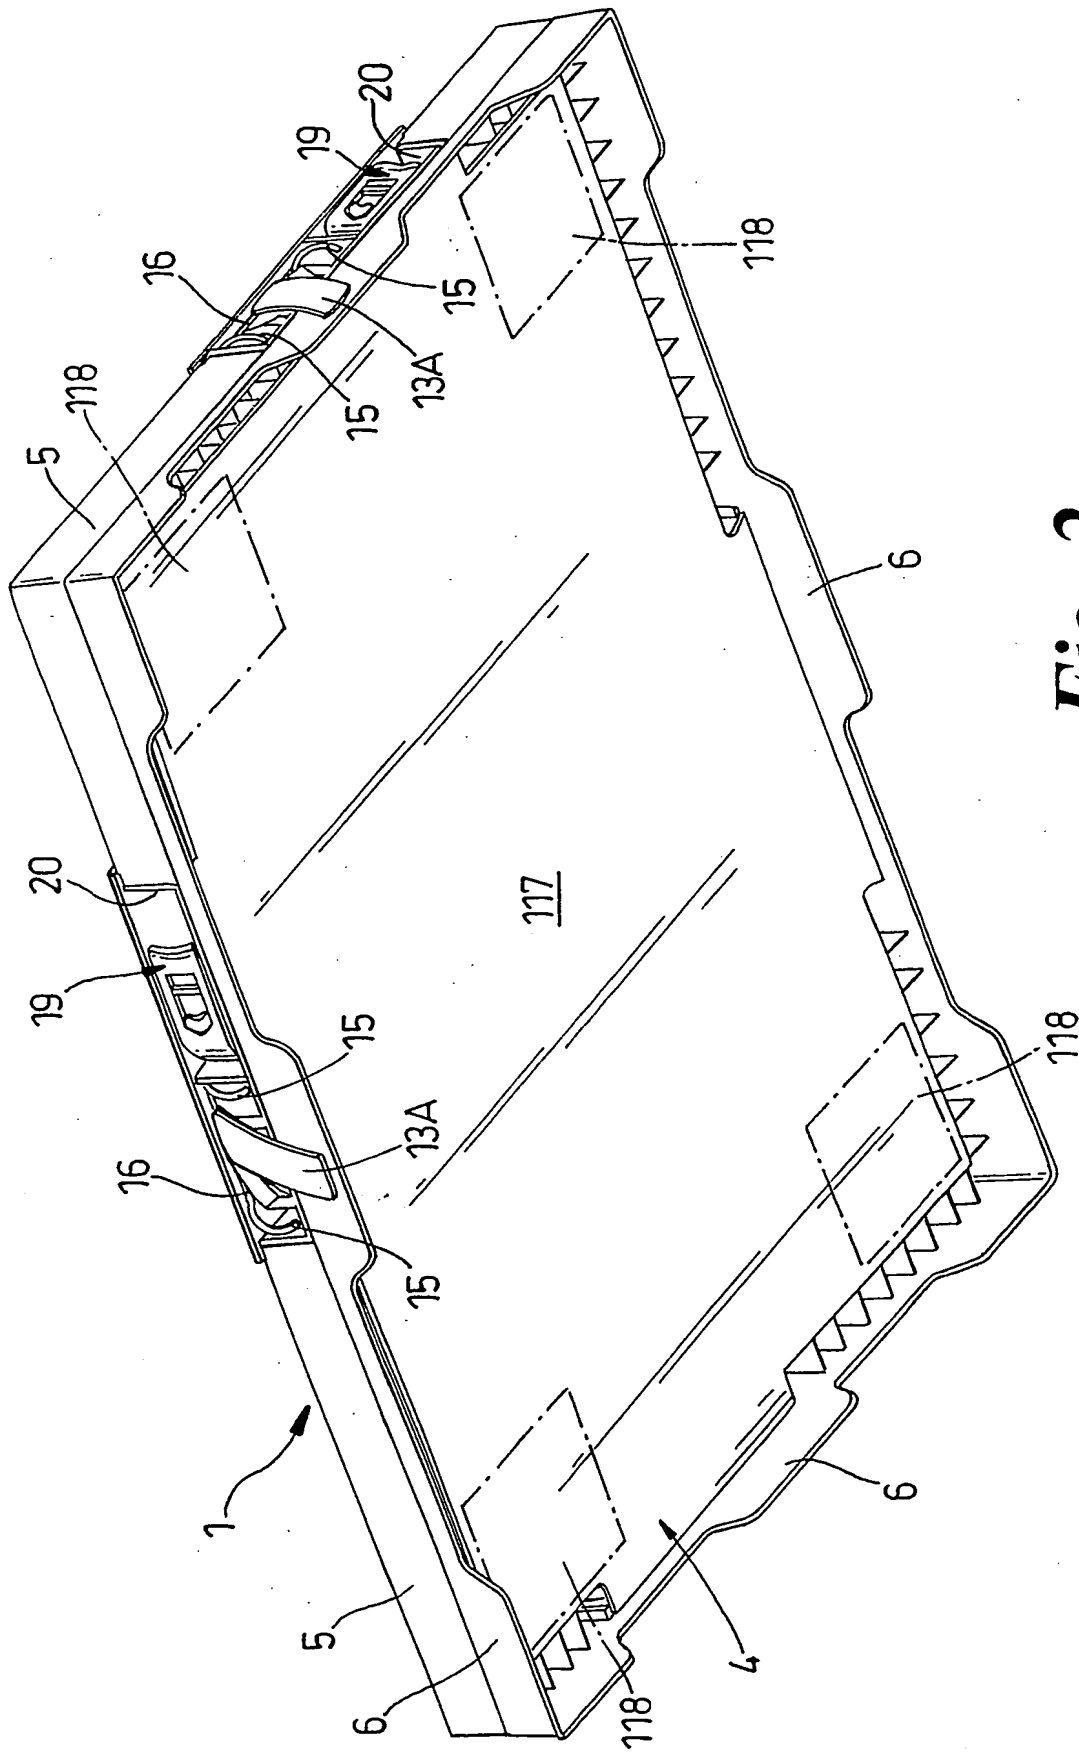
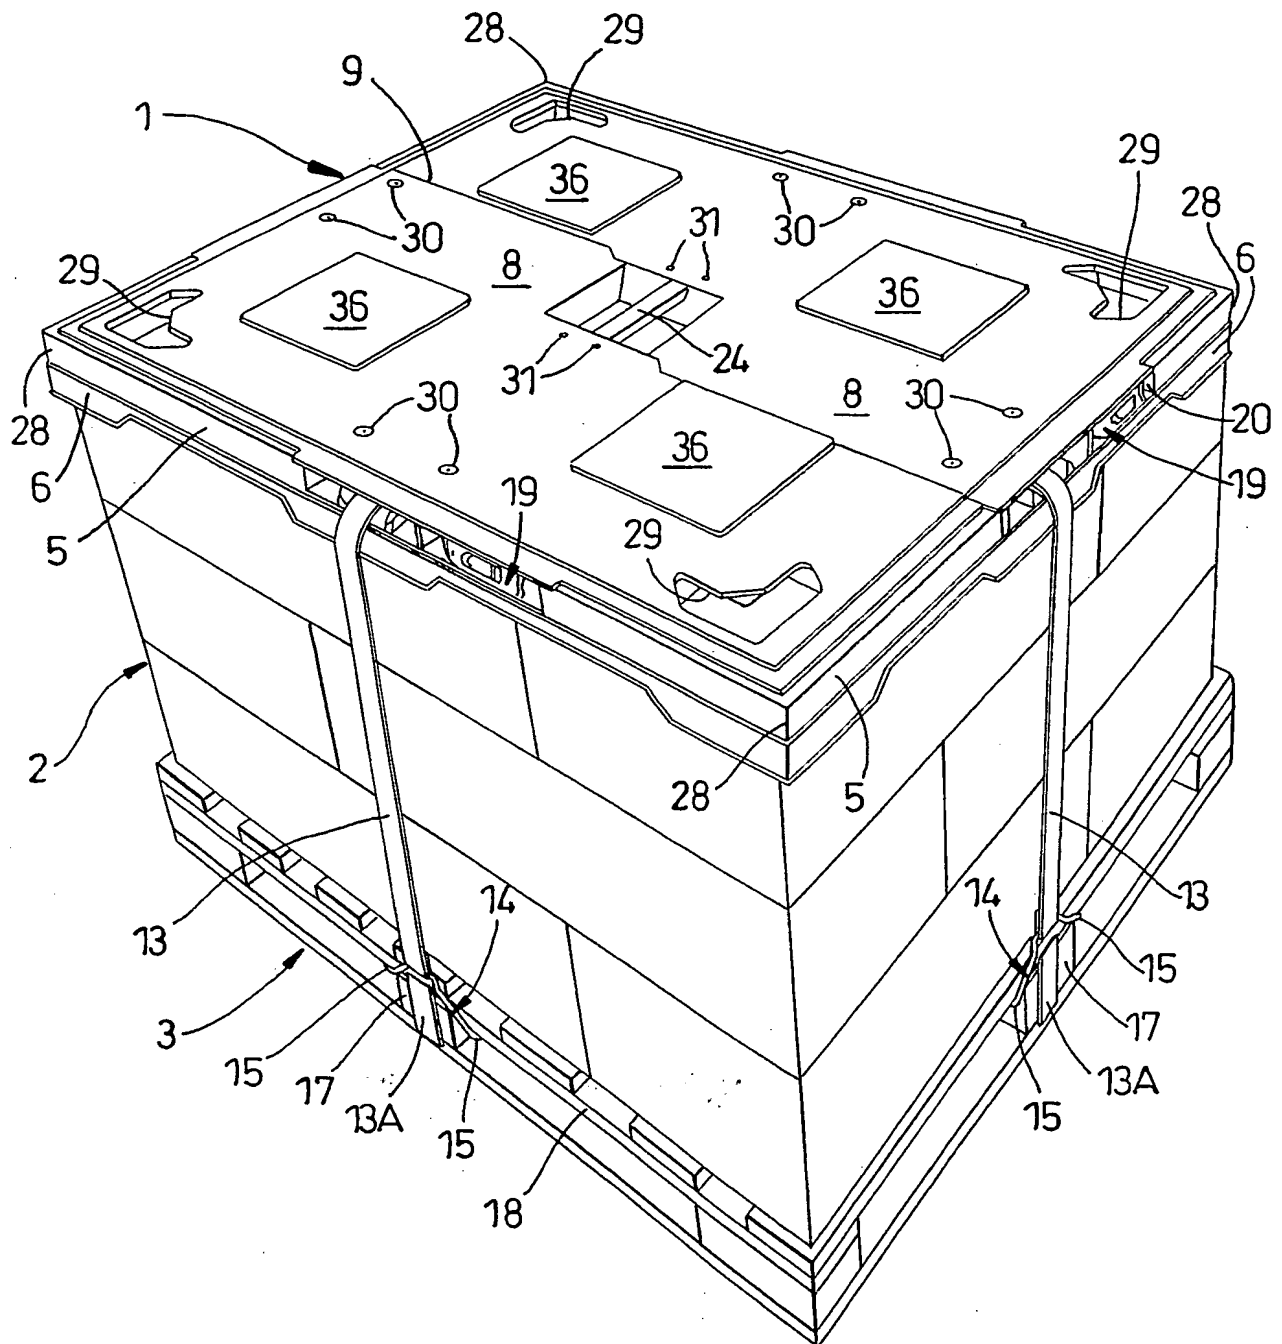


Fig. 2

USPTO 11 APR 2003


THIS PAGE BLANK (USPTO)

3/18

*Fig. 3*


THIS PAGE BLANK (USPTO)

4/18

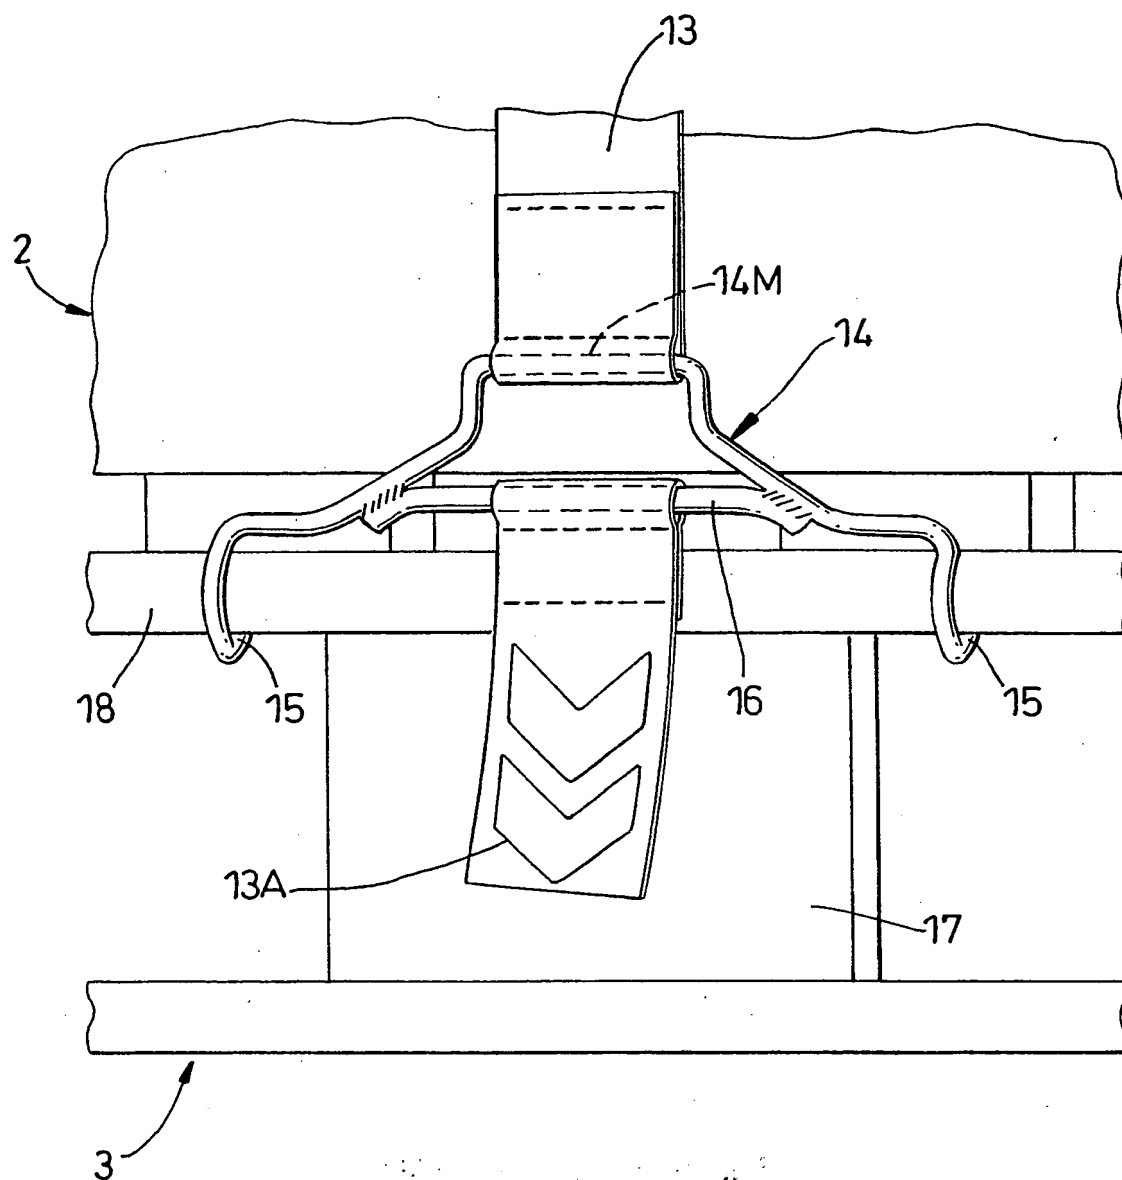*Fig. 4*



THIS PAGE BLANK (USPTO)

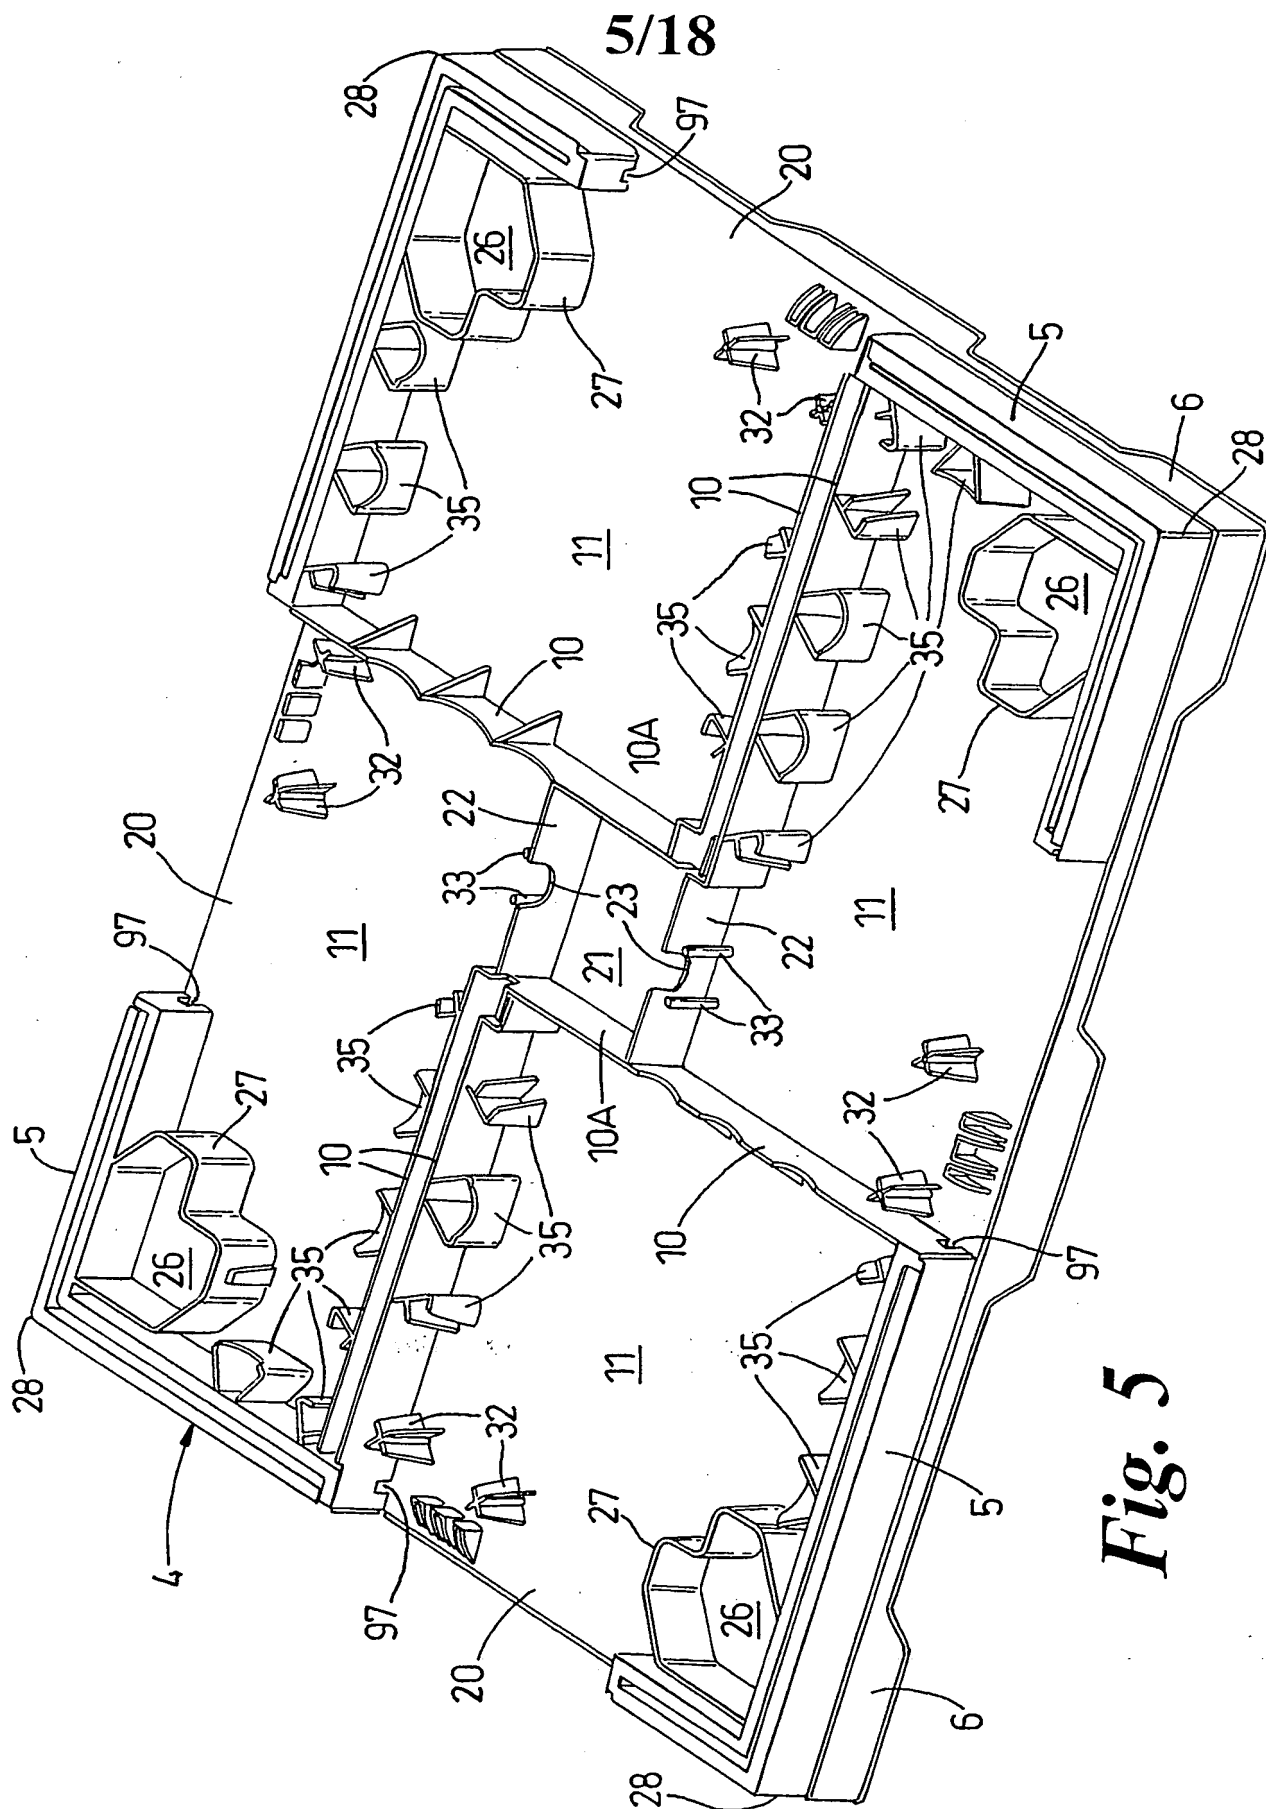

THIS PAGE BLANK (USPTO)

6/18

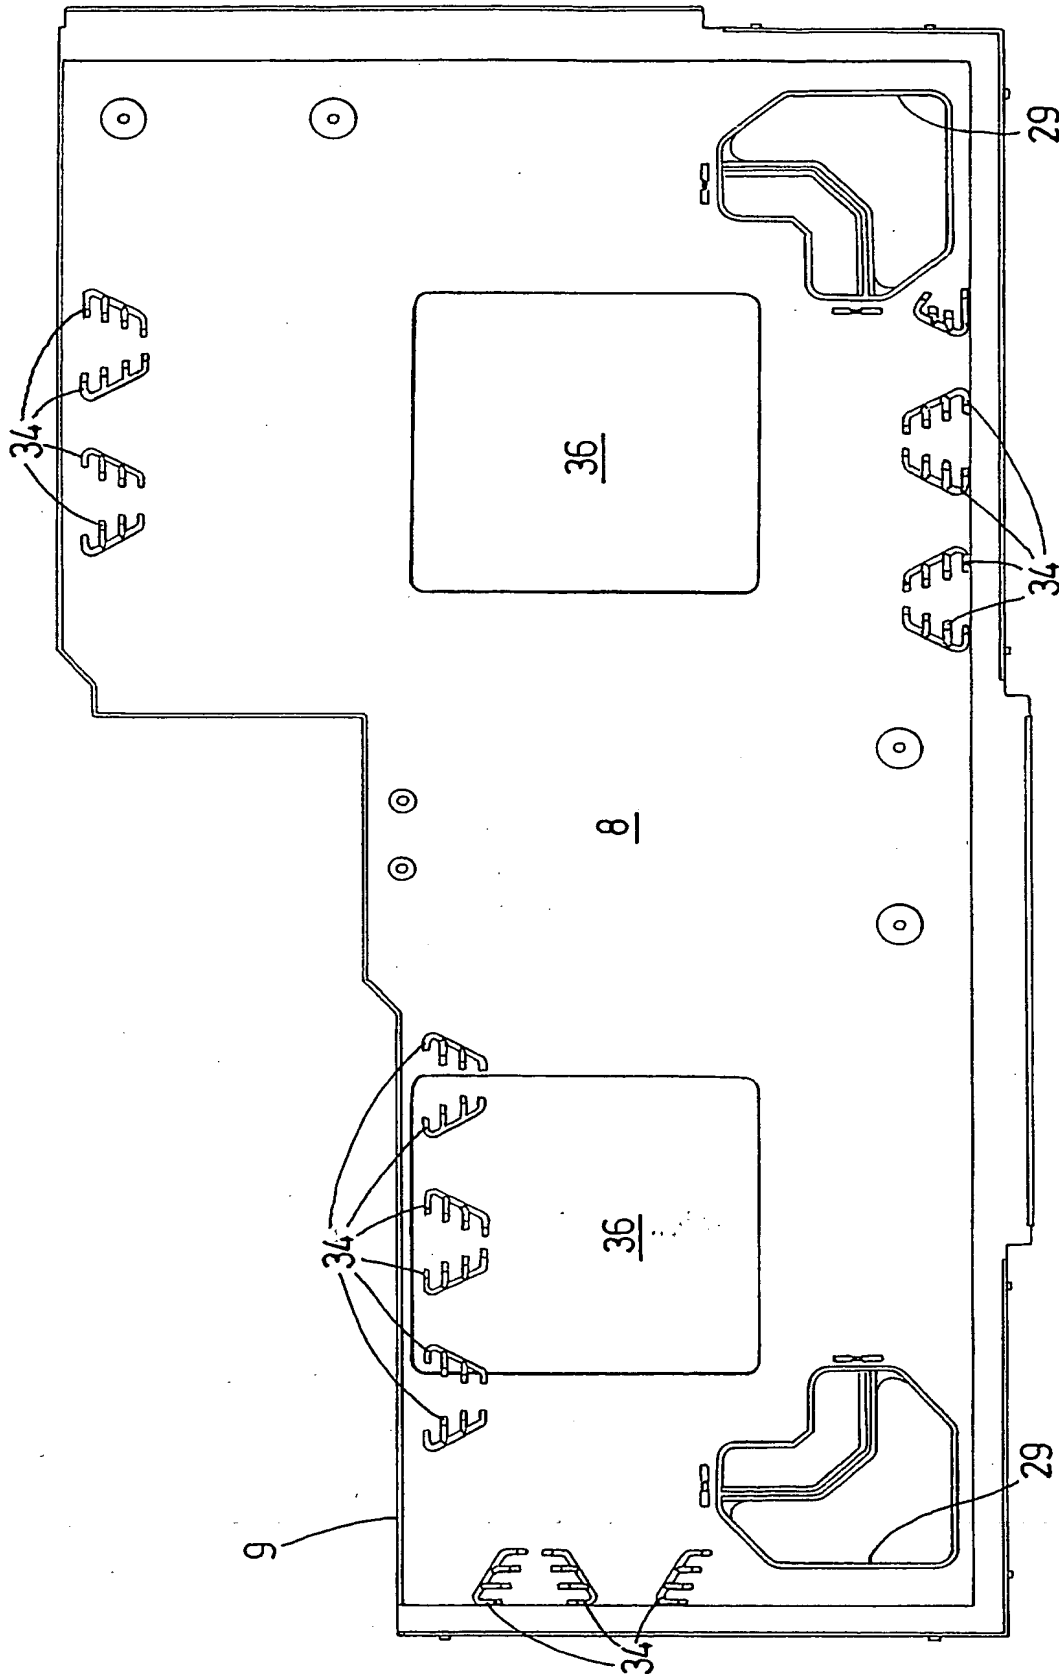
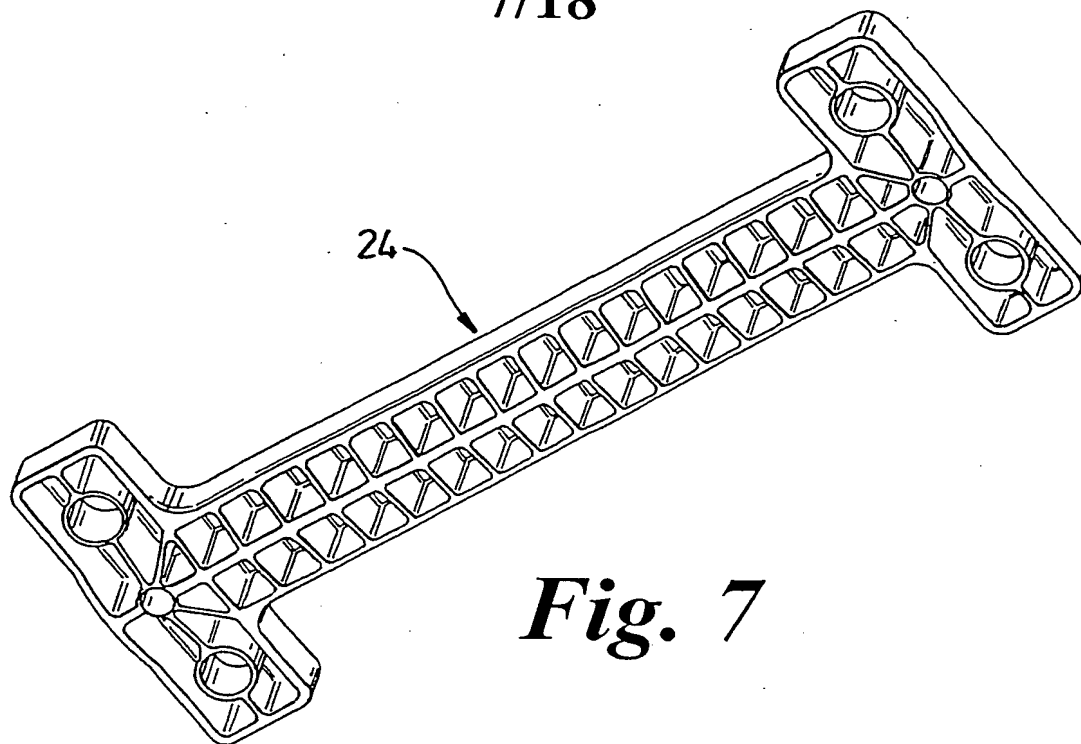
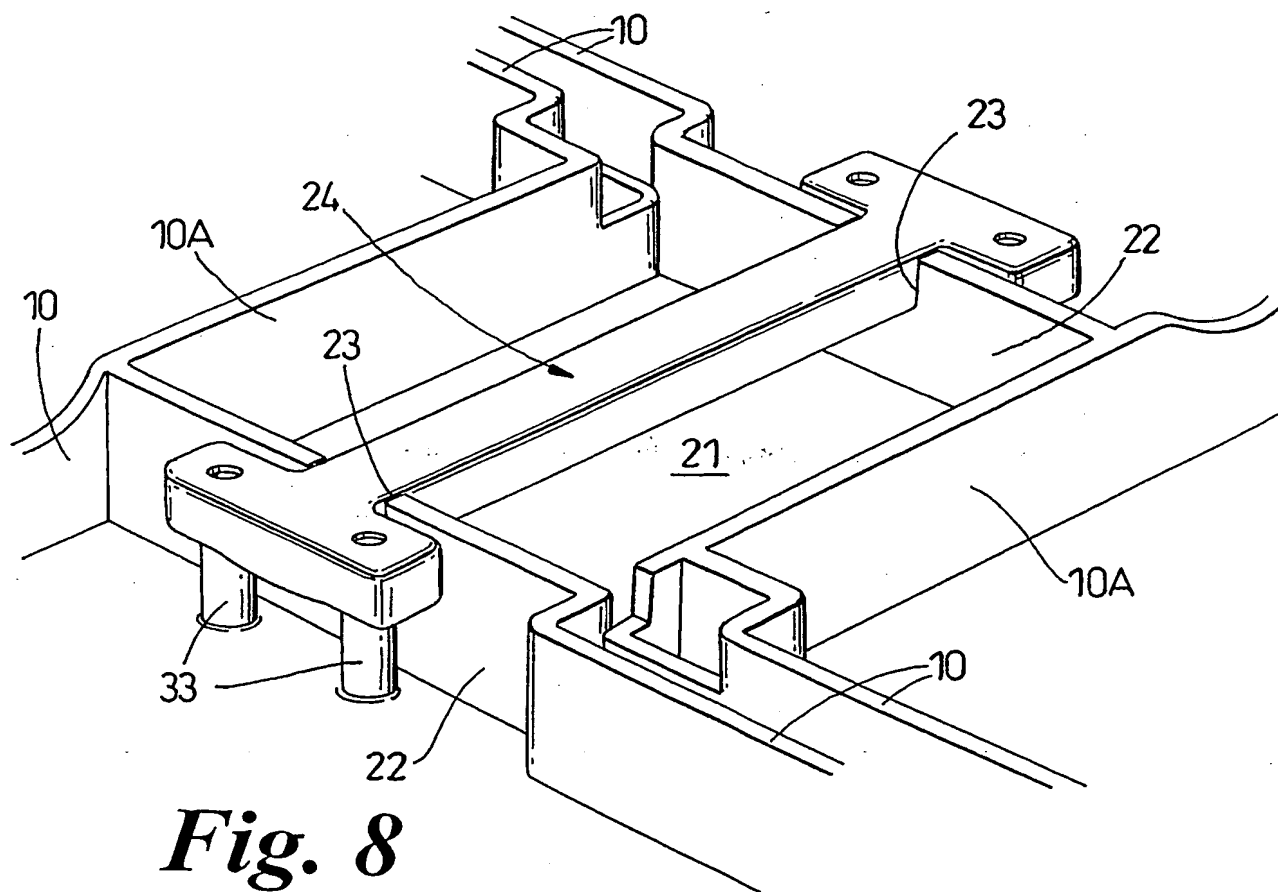


Fig. 6

THIS PAGE BLANK (USPTO)

7/18

*Fig. 7**Fig. 8*

THIS PAGE BLANK (USPTO)

8/18

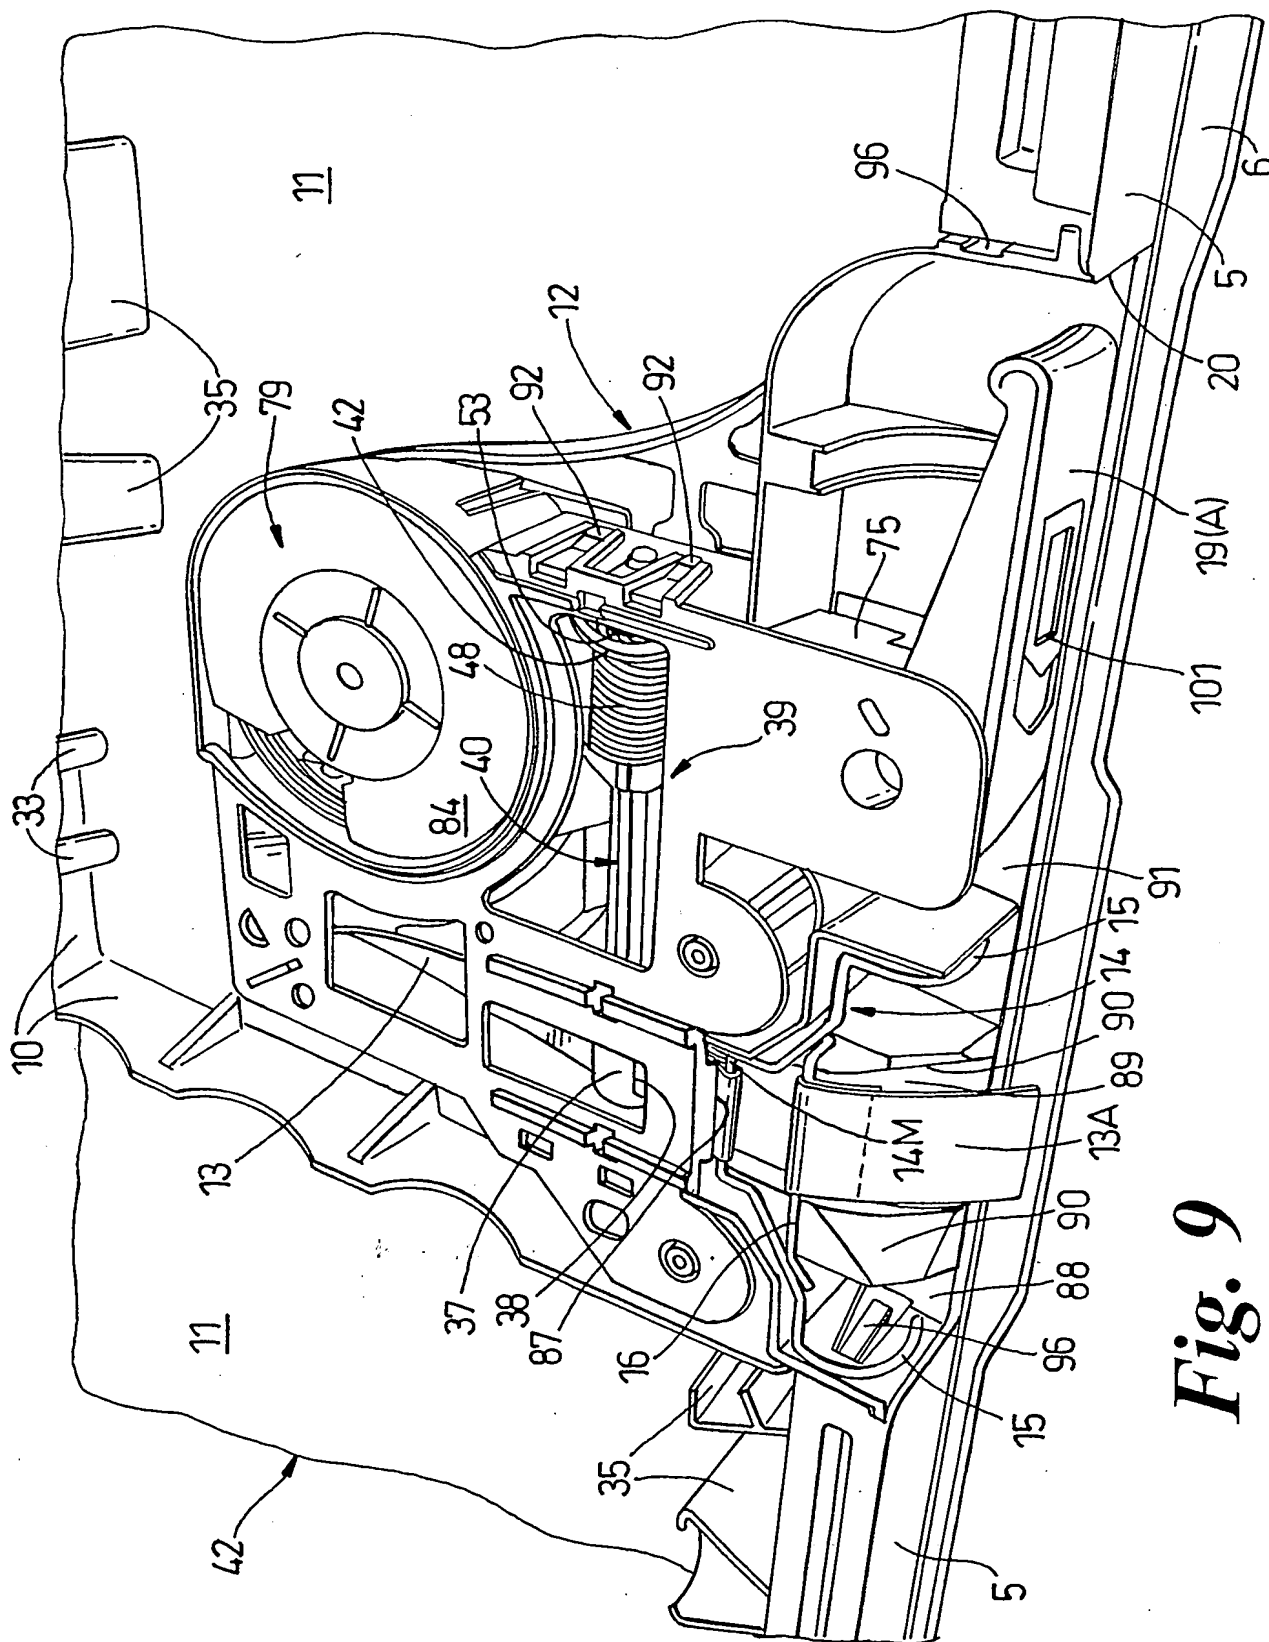
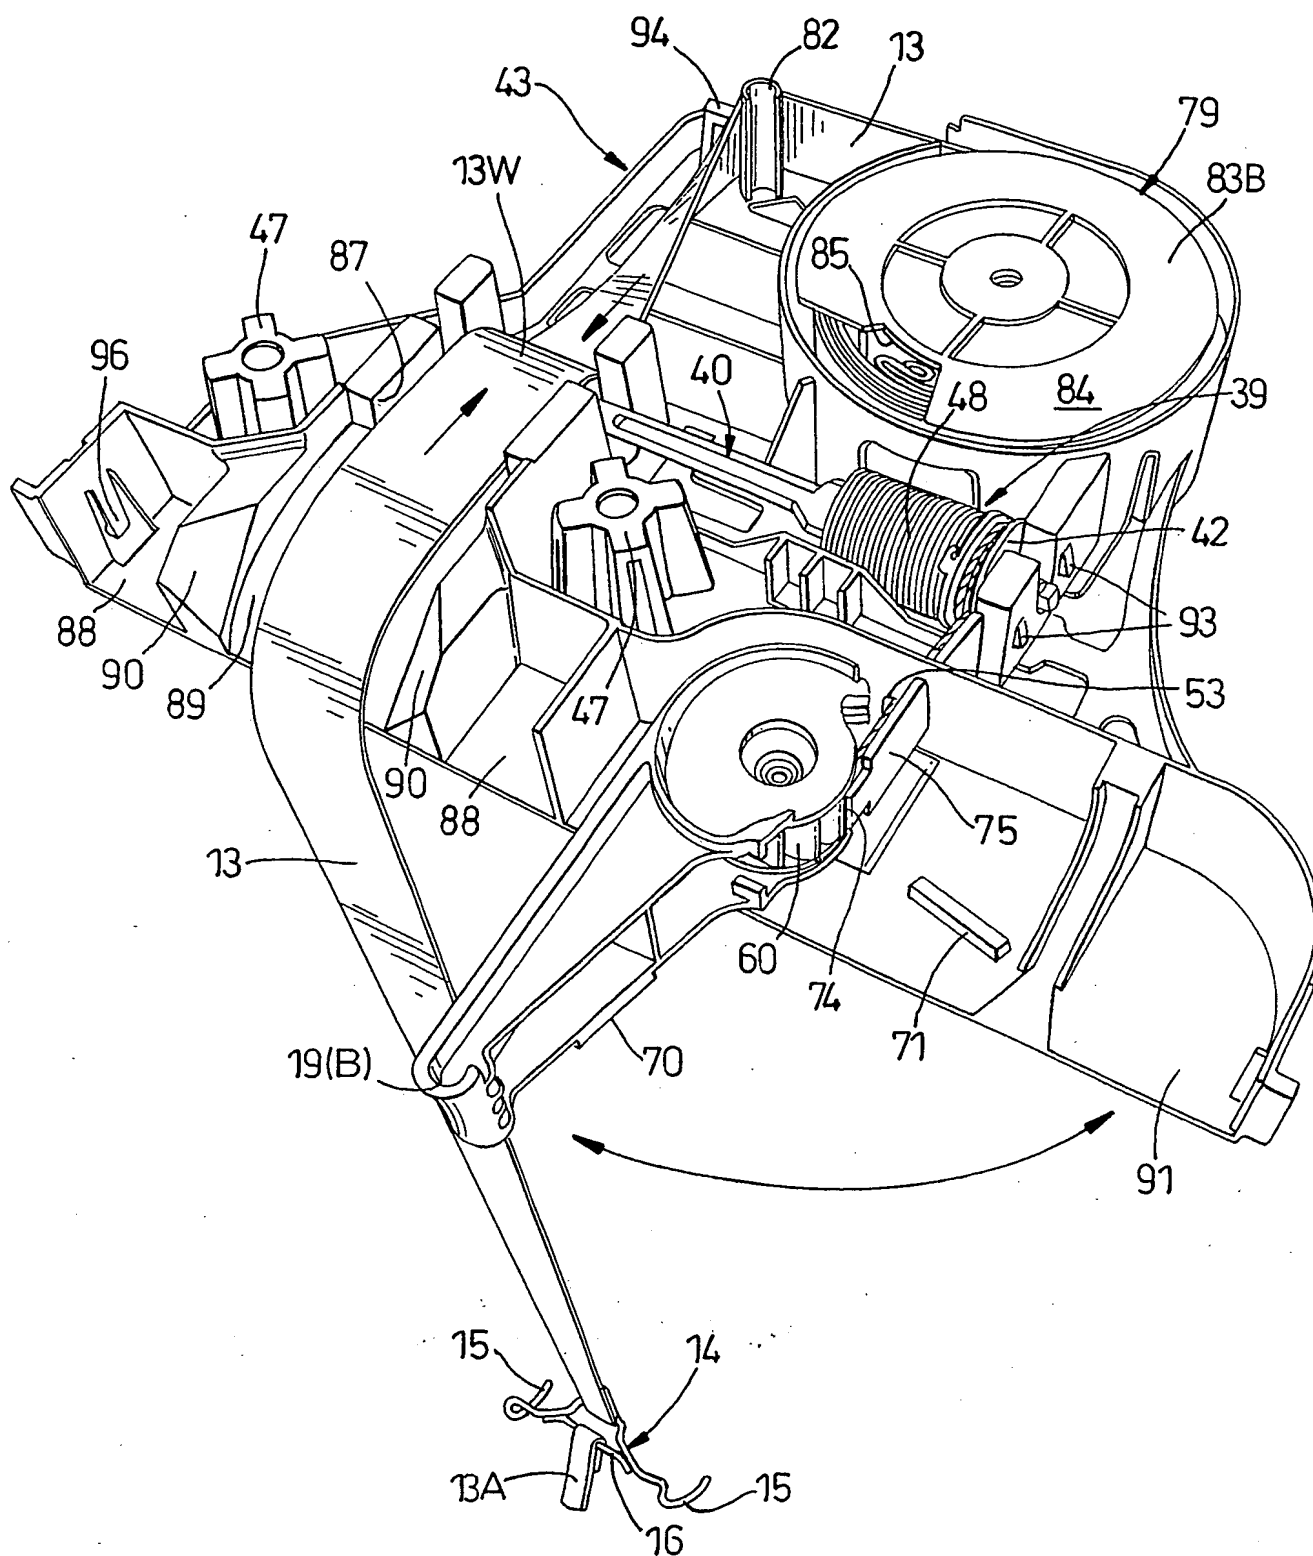


Fig. 9

THIS PAGE BLANK (USPTO)

9/18

**Fig. 10**

THIS PAGE BLANK (USPTO)

10/18

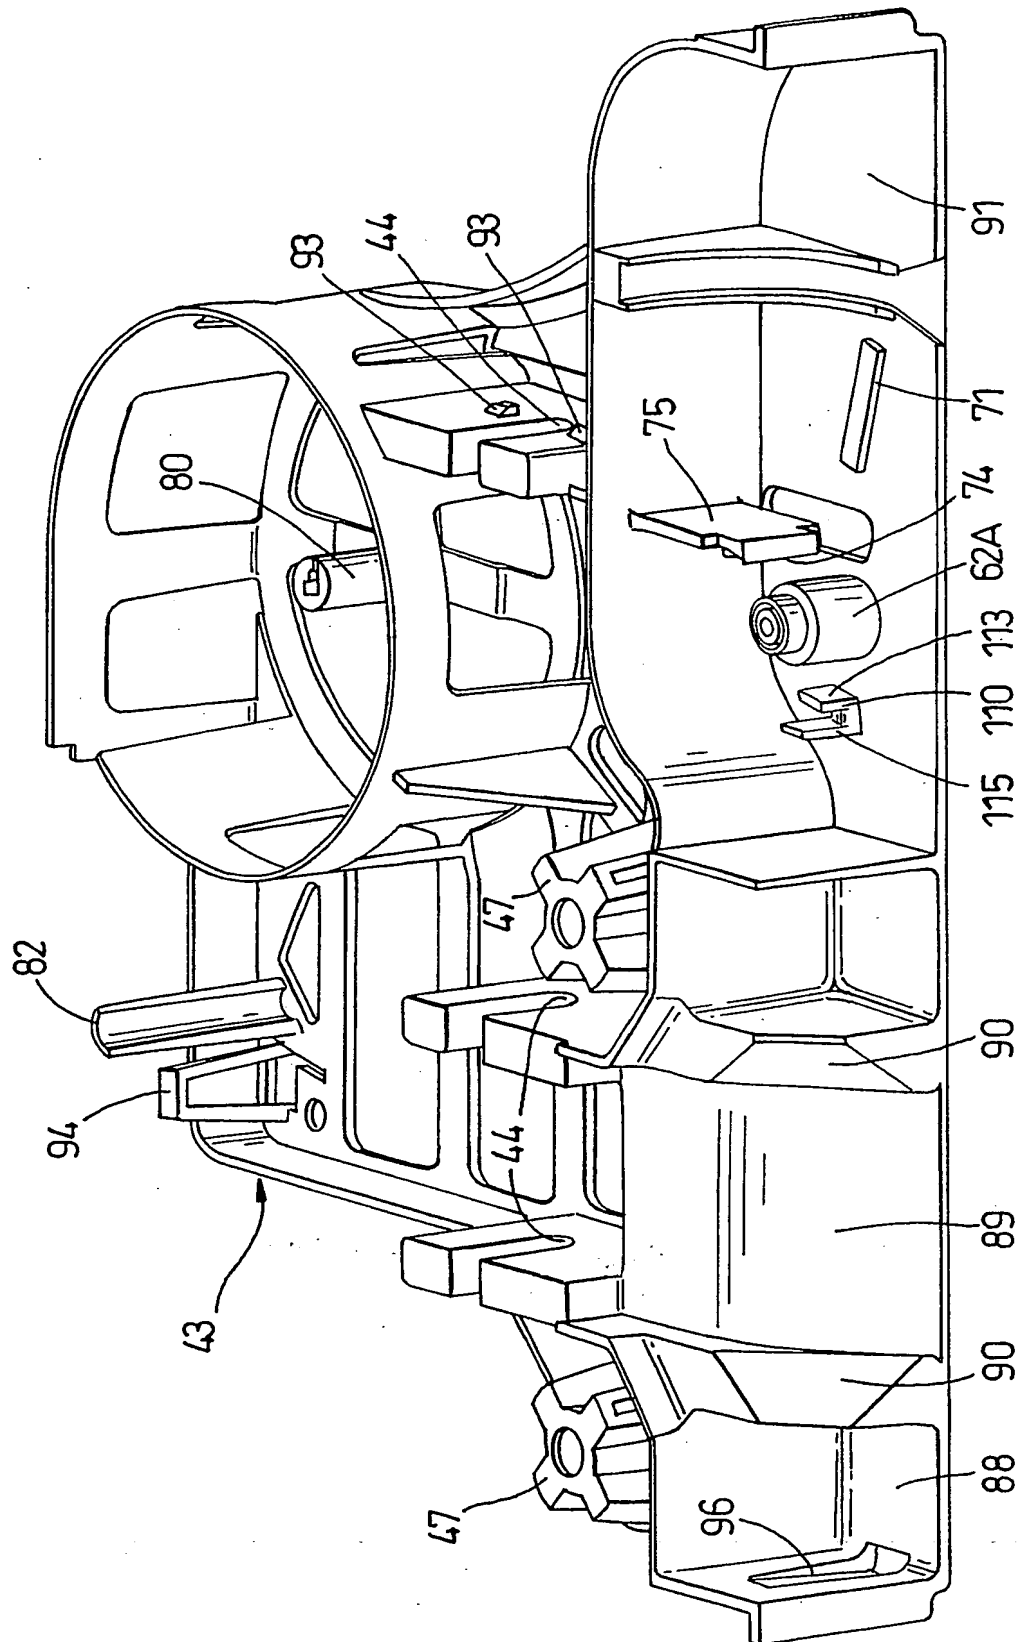
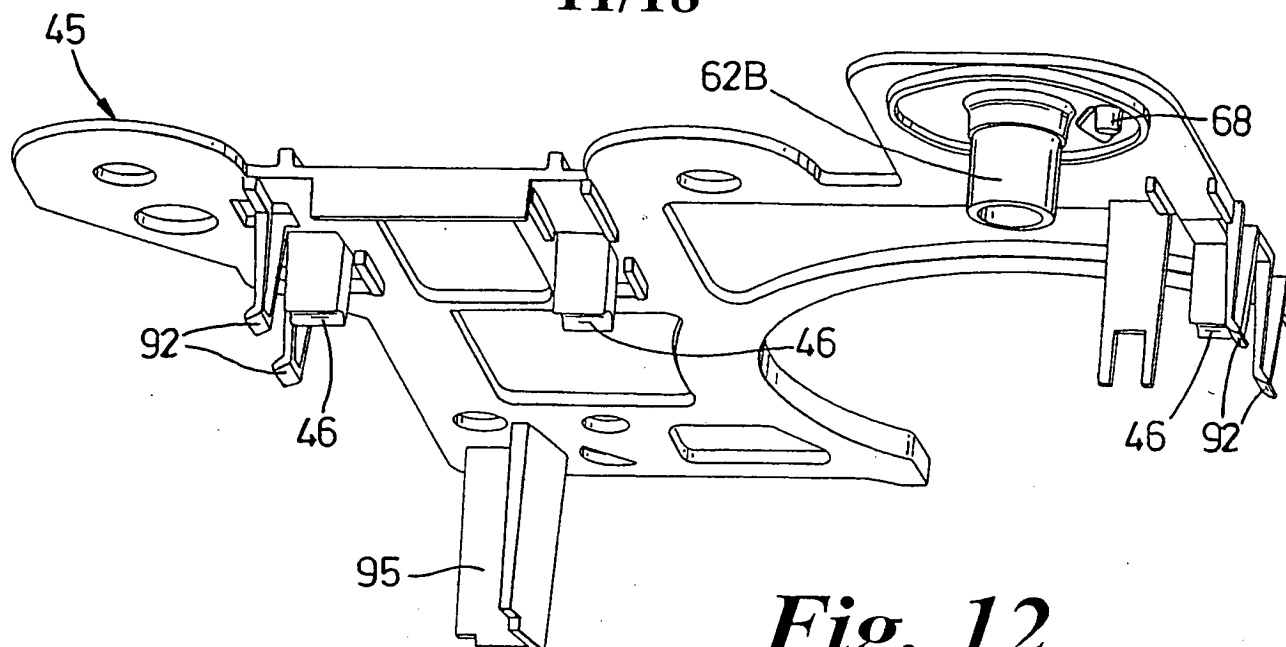
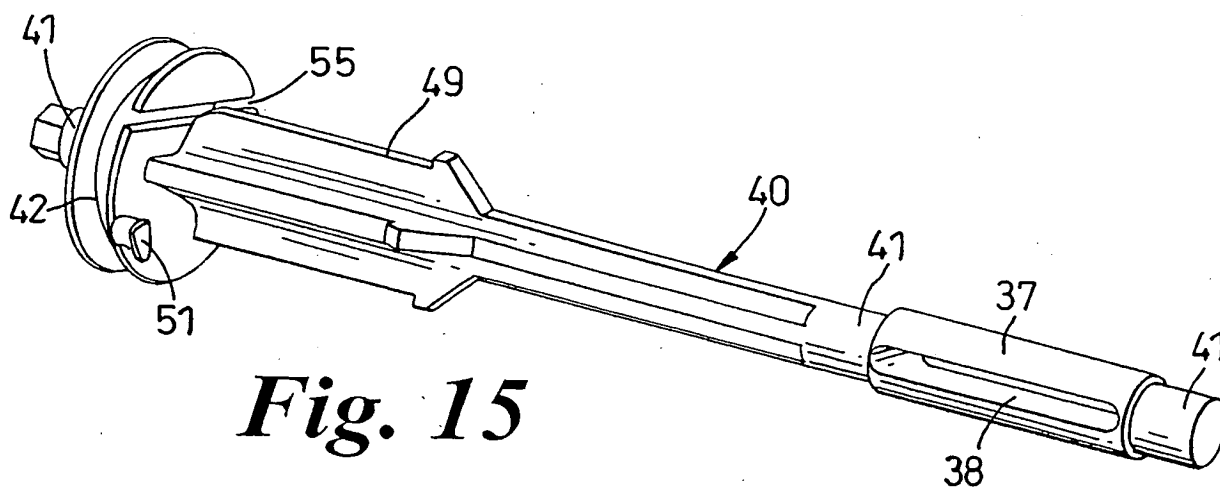
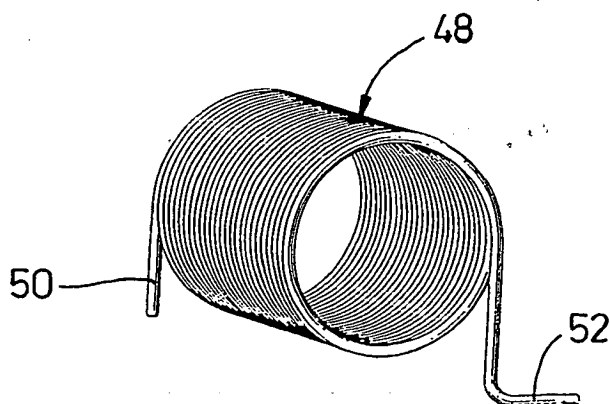


Fig. 11

THIS PAGE BLANK (USPTO)

11/18

*Fig. 12**Fig. 15**Fig. 16*

THIS PAGE BLANK (USPTO)

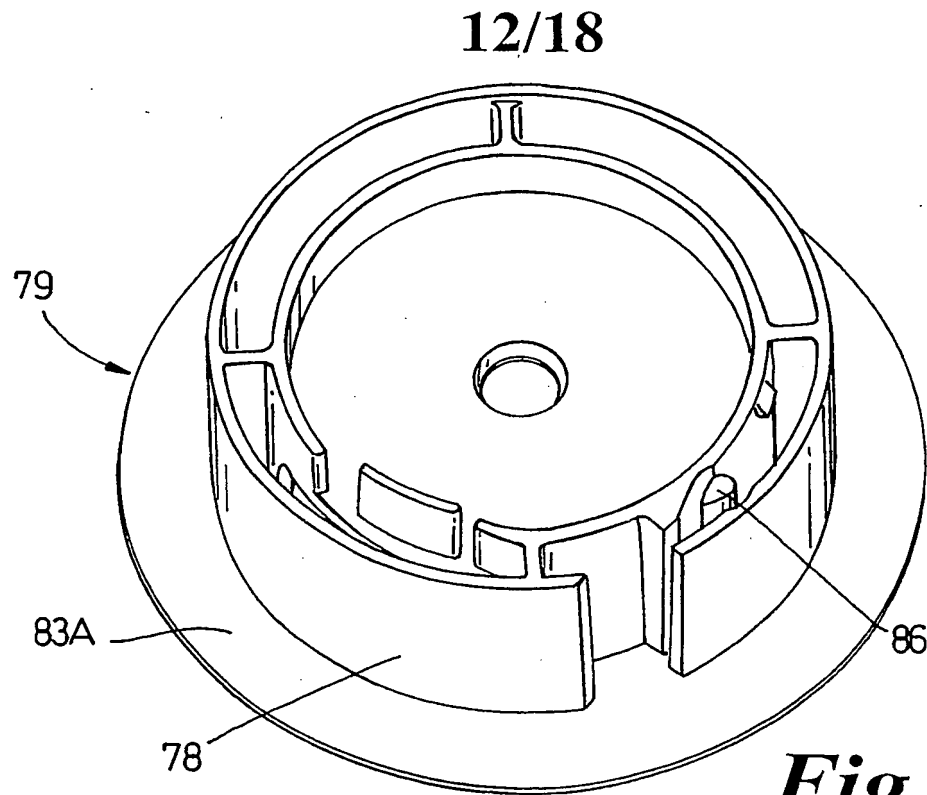


Fig. 13





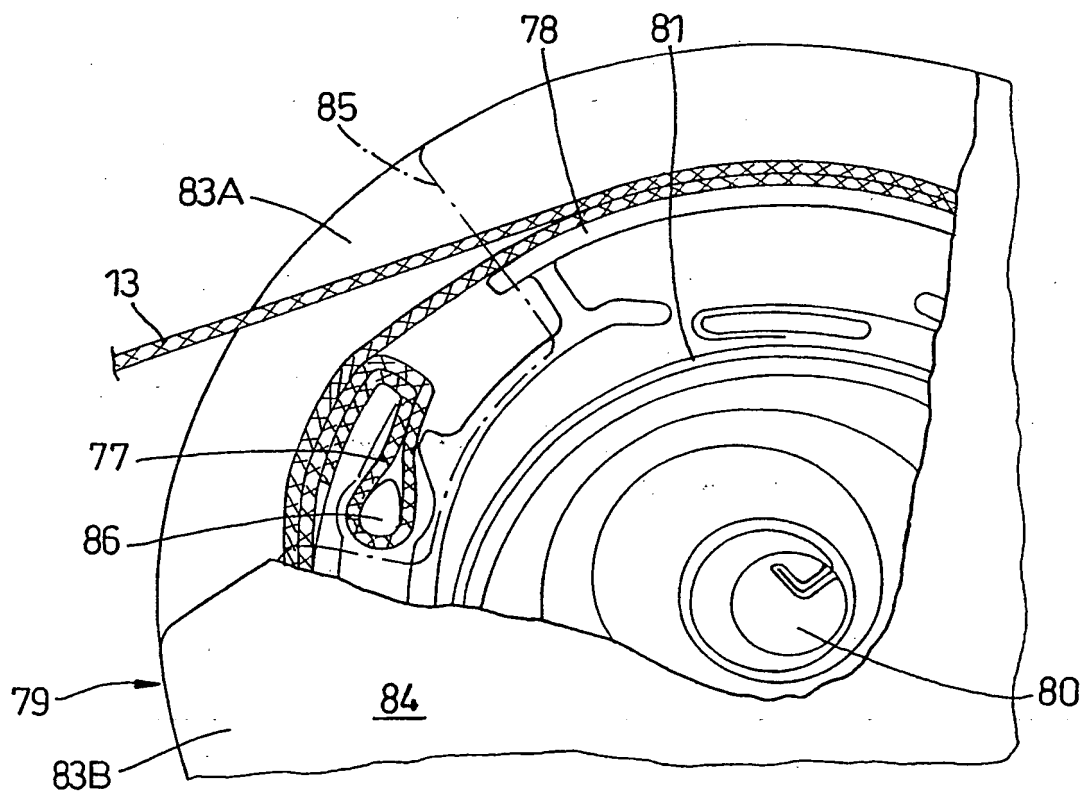





Fig. 14

THIS PAGE BLANK (USPTO)

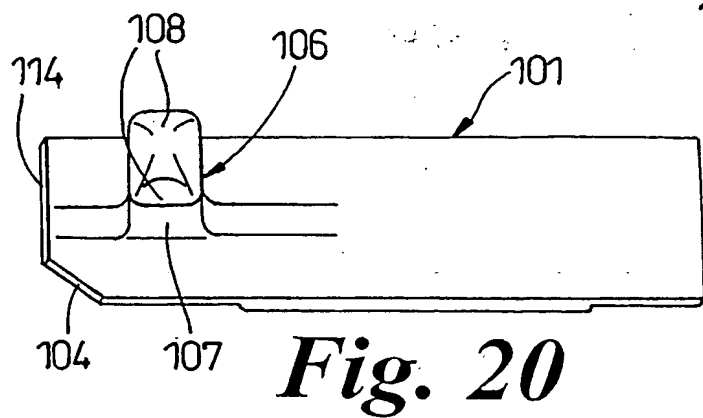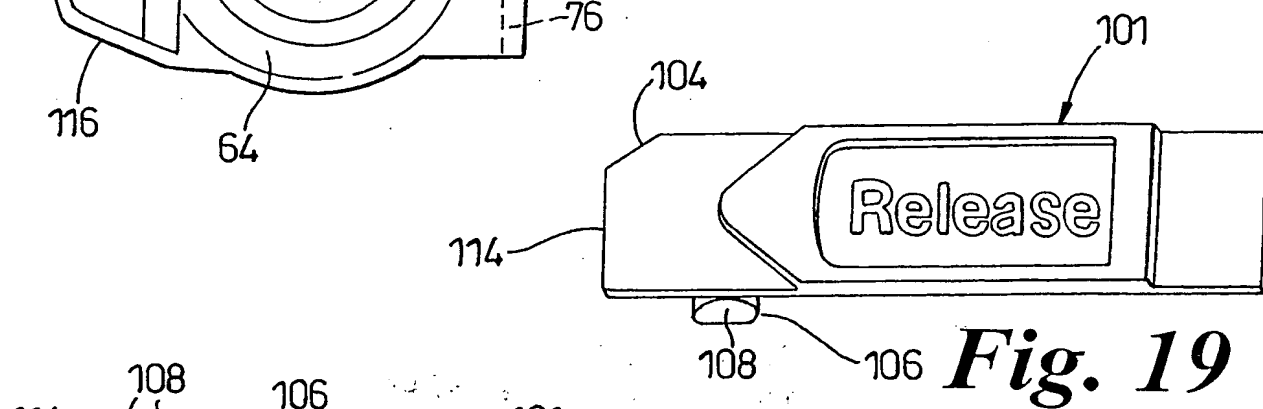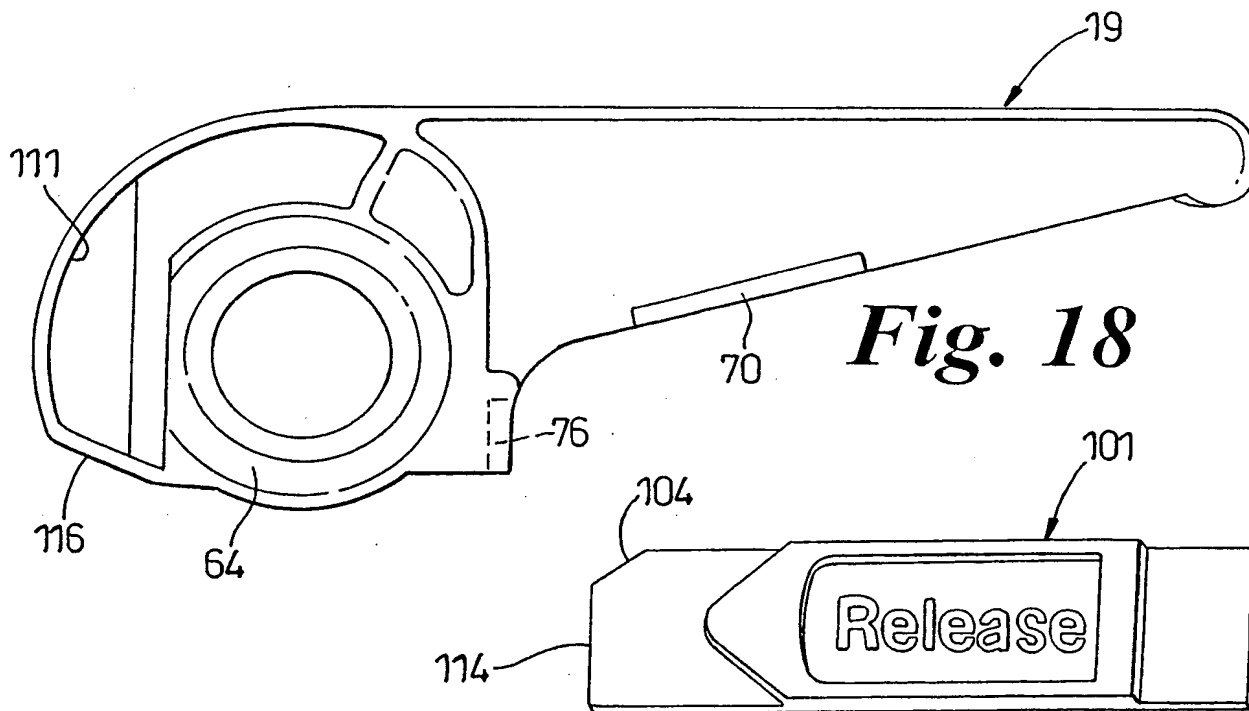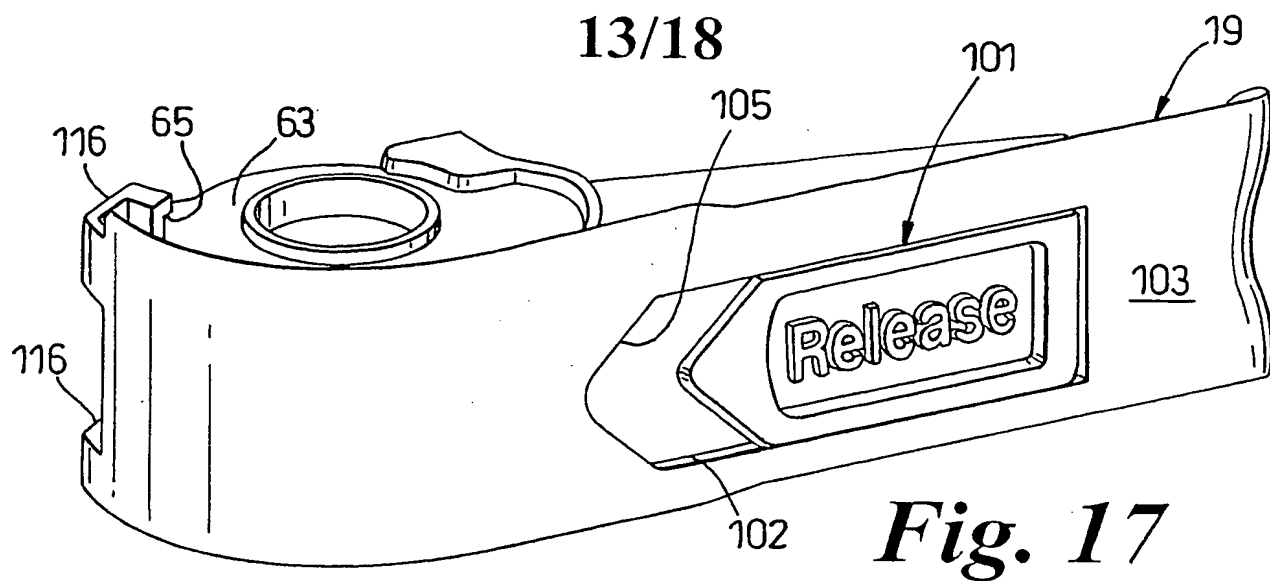


JC13 Rec'd PCT/PTO 11 APR 2009

THIS PAGE BLANK (USPTO)

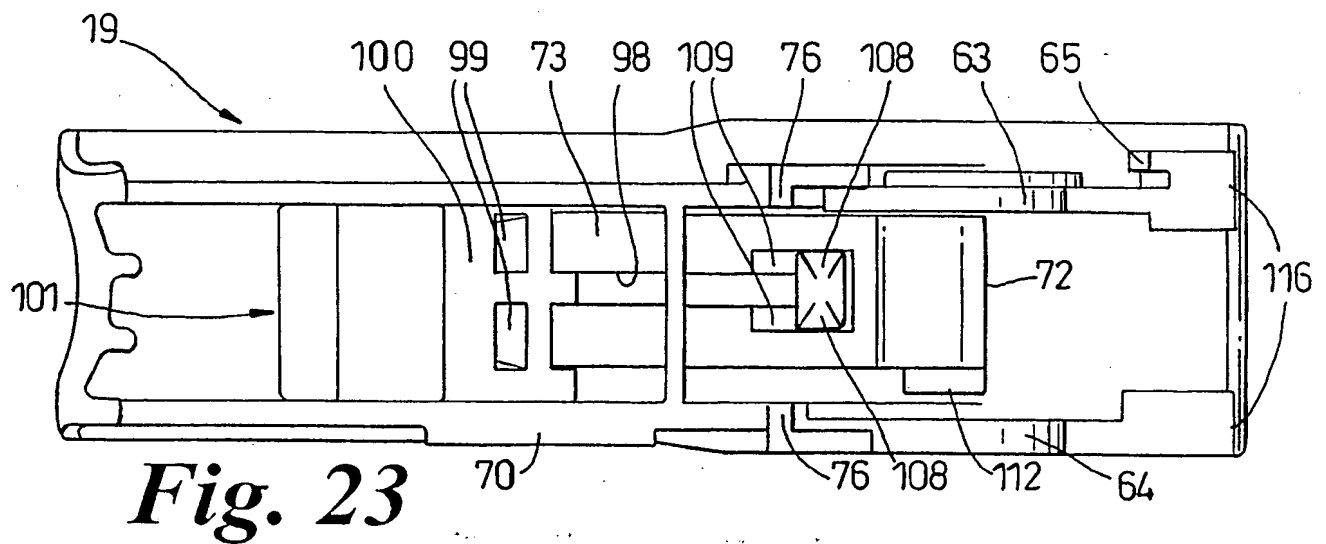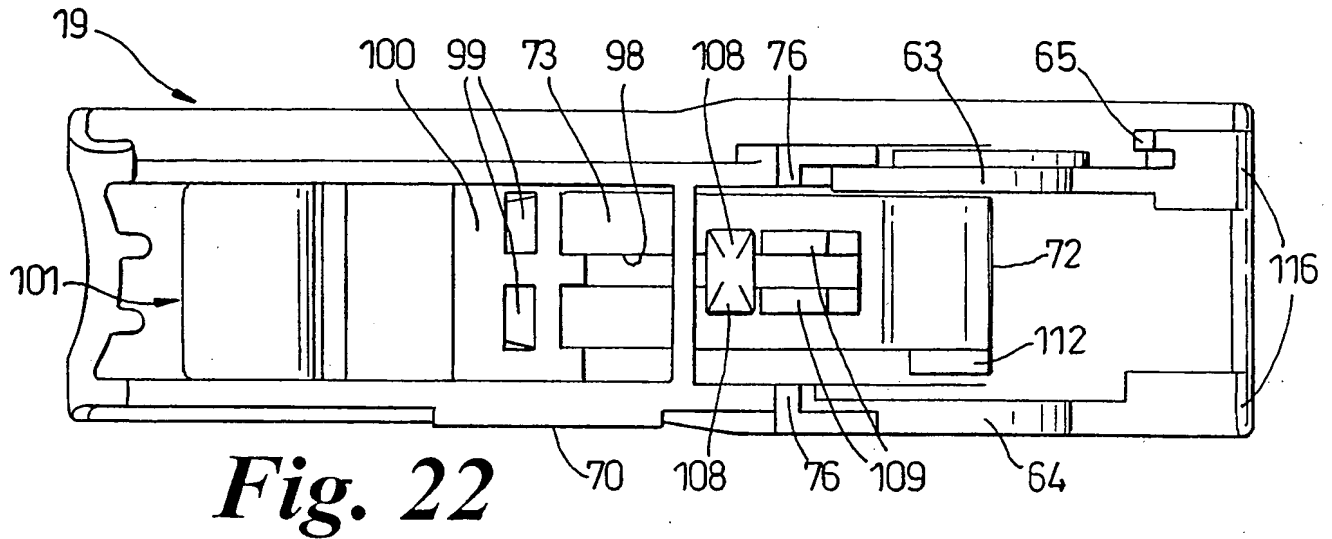
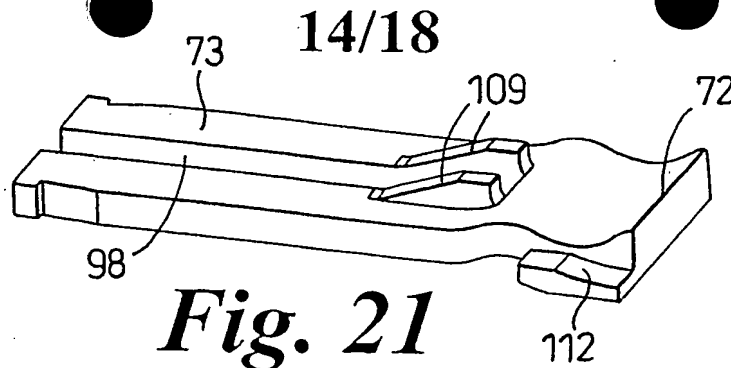


THIS PAGE BLANK (USPTO)

15/18


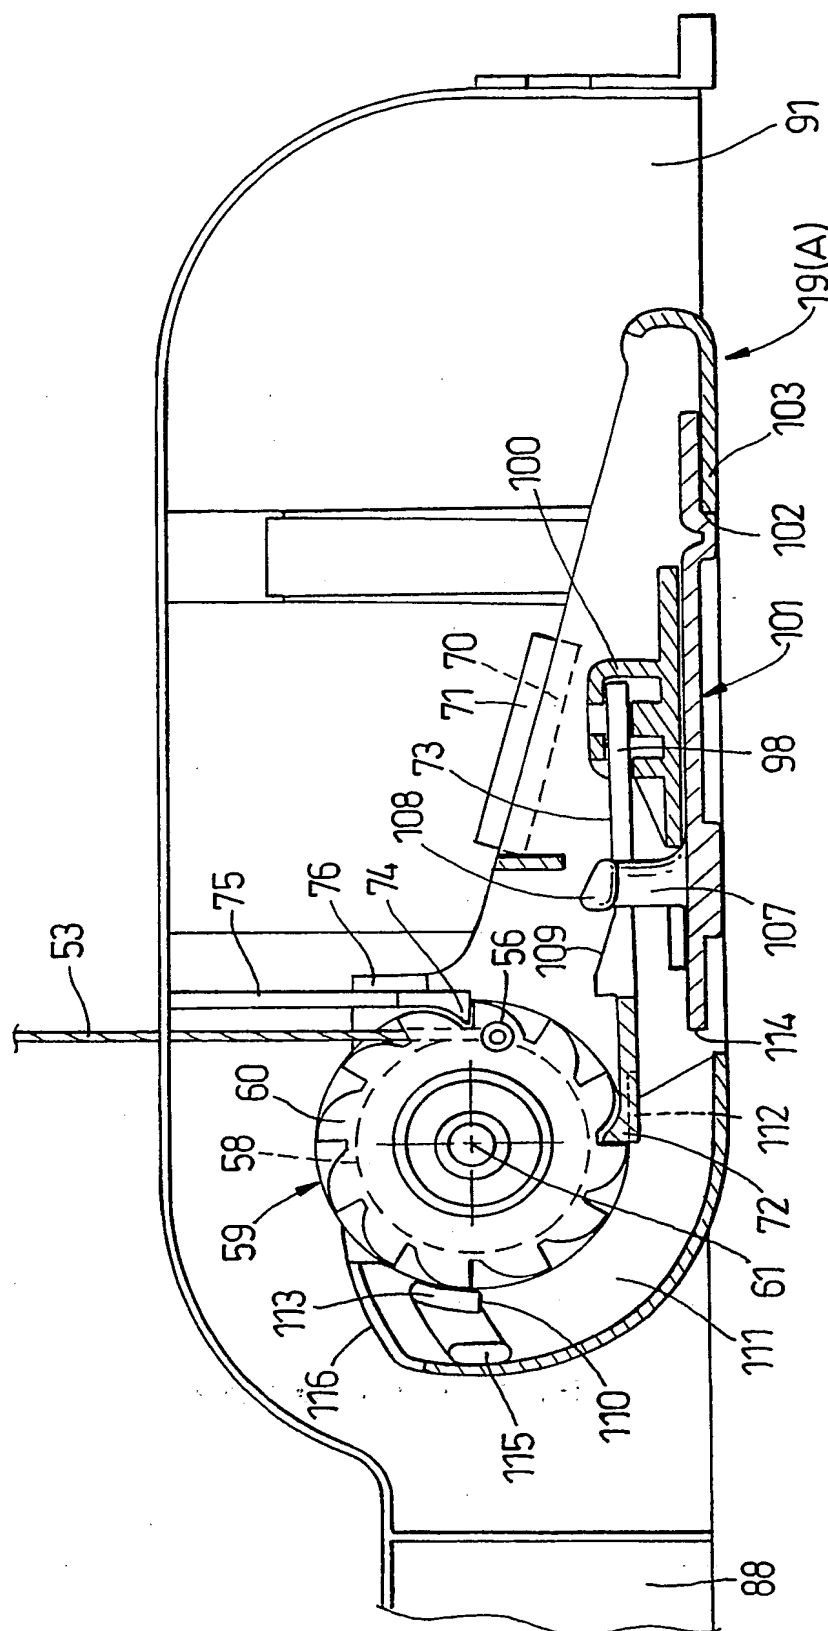
*Fig. 27*

16/18

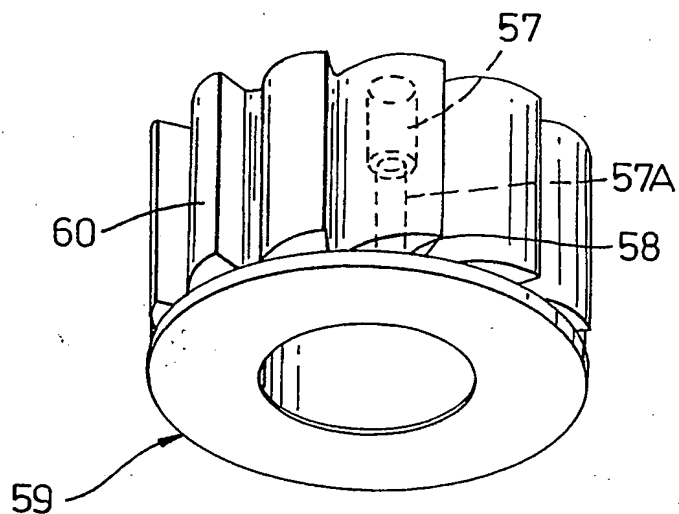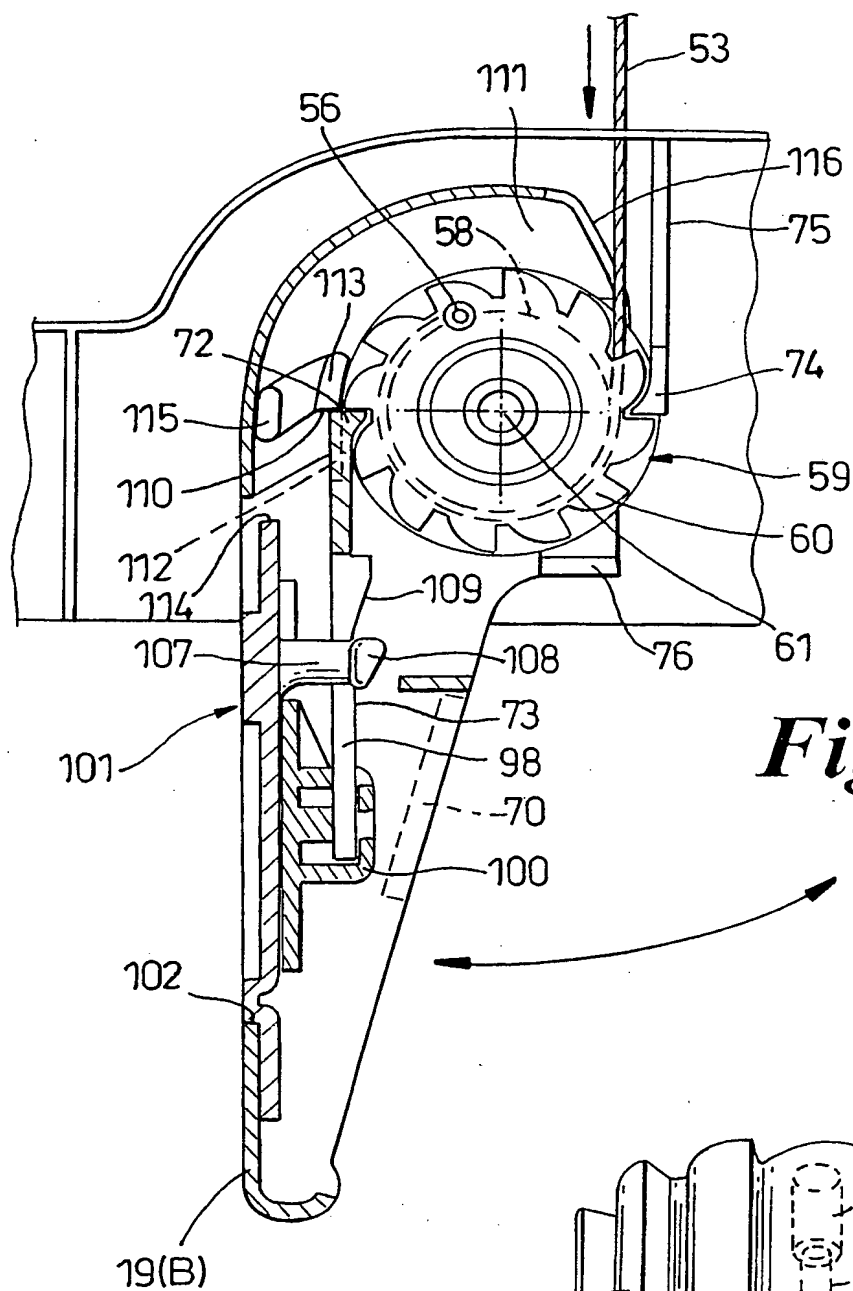

THIS PAGE BLANK (USPTO)


17/18

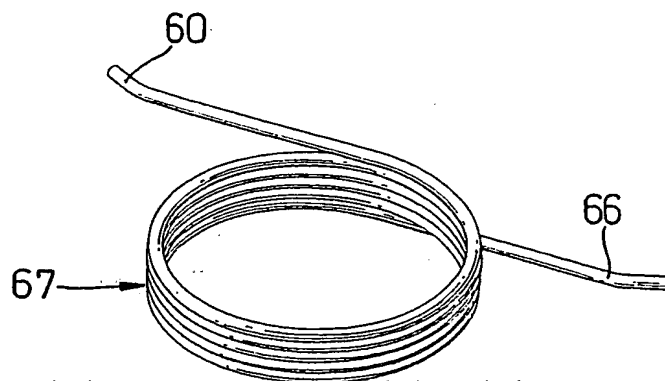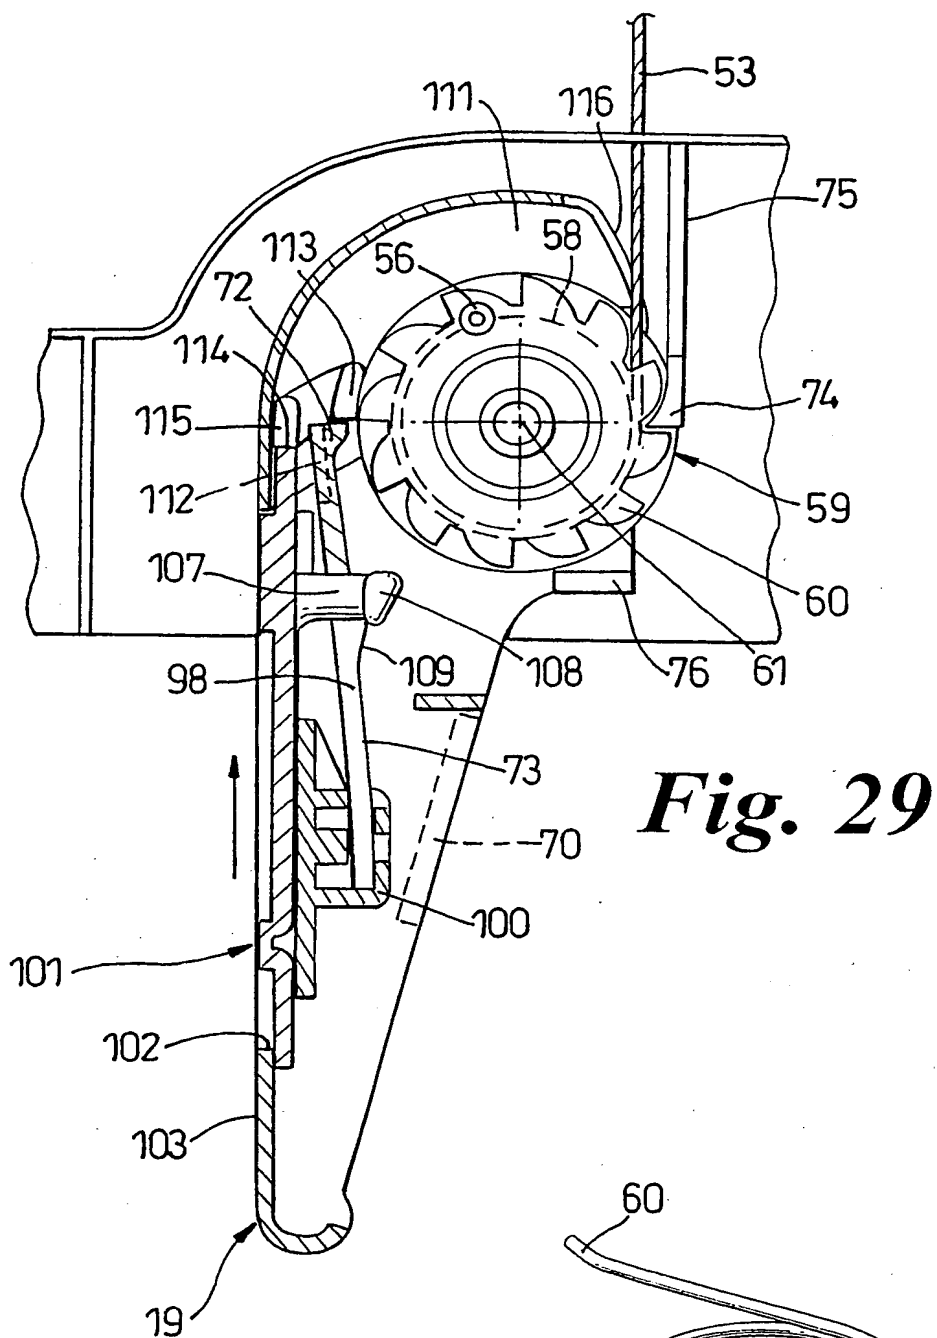

GC13 Rec'd PCT/PTO 11 APR 2003

THIS PAGE BLANK (USPTO)

18/18

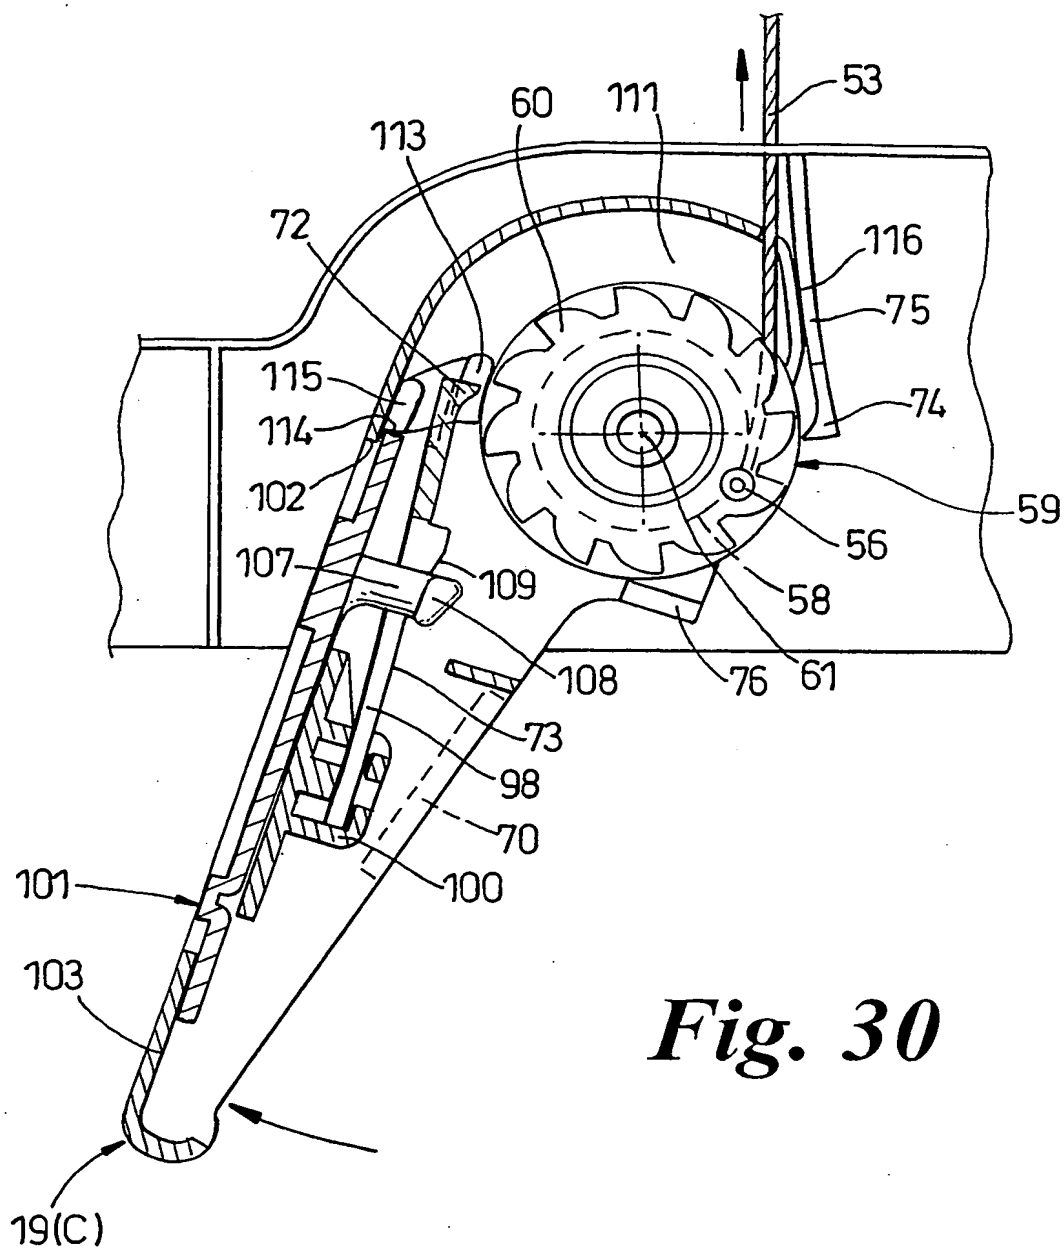**Fig. 30**

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

Application No
/GB2004/002166

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B65D71/00 B60P7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B65D B60P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01/96203 A (GRIPPLE LIMITED) 20 December 2001 (2001-12-20) cited in the application the whole document	1, 39
A	GB 734 002 A (SHARP) 20 July 1955 (1955-07-20) page 2, line 125 - page 3, line 43; figures	1, 39
A	US 3 848 889 A (SHARROW) 19 November 1974 (1974-11-19) column 2, line 57 - column 4, line 30; figures 1-3	39
A	US 3 602 065 A (RATCLIFFE) 31 August 1971 (1971-08-31) column 2, line 70 - column 4, line 30; figures	39

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

8 September 2004

Date of mailing of the international search report

17/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Newell, P

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB2004/002166

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 57, 58
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.2

Claims Nos.: 57,58

Rule 6.2 (a) PCT.

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guideline C-VI, 8.5), should the problems which led to the Article 17(2) declaration be overcome.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Application No

/GB2004/002166

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0196203	A	20-12-2001	AT 264232 T	15-04-2004
			AU 3944301 A	24-12-2001
			BR 0111565 A	09-09-2003
			CA 2412019 A1	20-12-2001
			CN 1436141 T	13-08-2003
			DE 60102816 D1	19-05-2004
			DK 1289850 T3	12-07-2004
			EP 1289850 A1	12-03-2003
			WO 0196203 A1	20-12-2001
			GB 2363599 A ,B	02-01-2002
			HU 0300950 A2	28-08-2003
			JP 2004503442 T	05-02-2004
			NO 20025996 A	14-02-2003
			NZ 523146 A	31-10-2003
			US 2004101380 A1	27-05-2004
			ZA 200209848 A	21-10-2003
			AU 4259101 A	24-12-2001
			WO 0196204 A1	20-12-2001
			GB 2363598 A ,B	02-01-2002
GB 734002	A		NONE	
US 3848889	A	19-11-1974	NONE	
US 3602065	A	31-08-1971	NONE	